


LEDR S 2.0

CATALOGO

PROFILI PER SISTEMI
DI ILLUMINAZIONE A
LED IMPORTANTI

2017Volume2.0

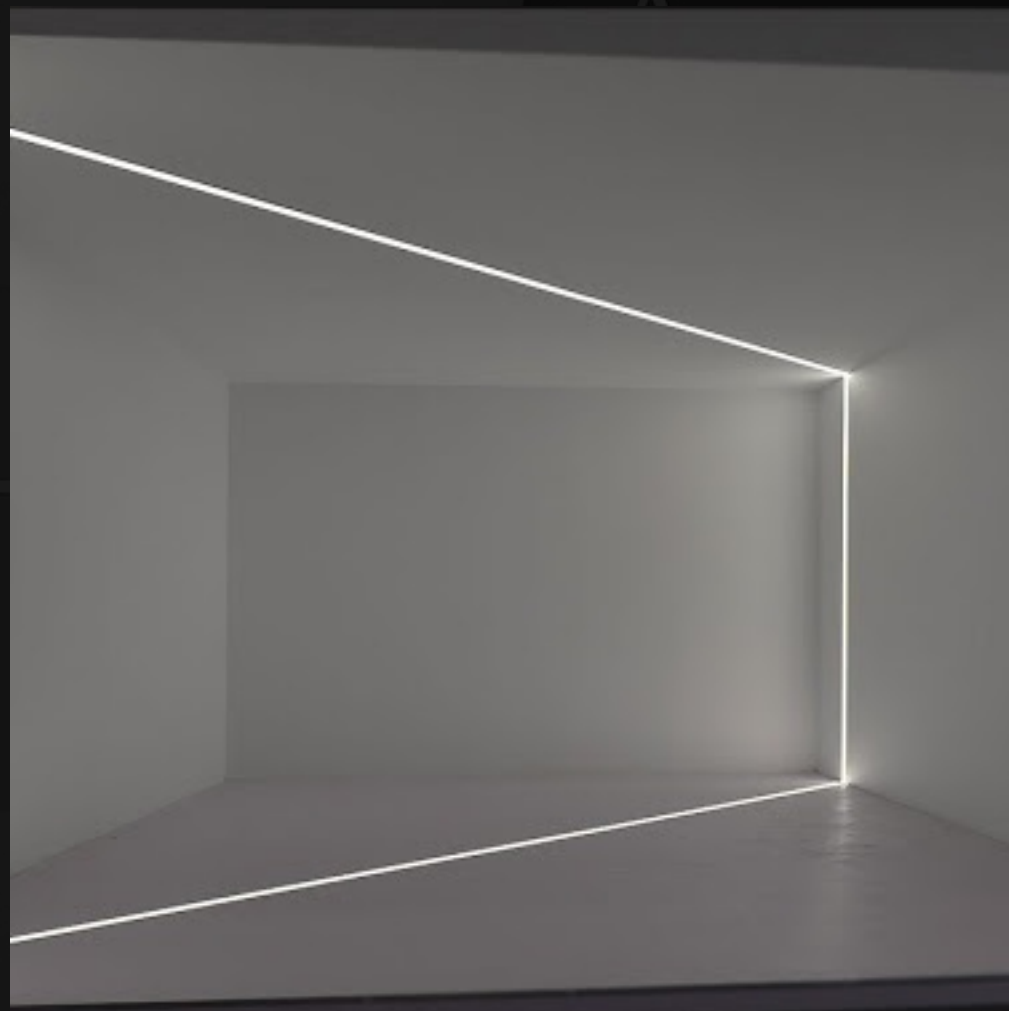

www.ledrichproject.it

ILLUMINAZIONE A LED LINEARE

CONTENUTO

INTRODUZIONI



SISTEMA DI ILLUMINAZIONE PRINCIPALE	01
LEDR LLS 2.0	07
PRODOTTI	09
HIGHLIGHTS	11


LEDR S 2.0



LDRSSERIES	21
LDRE SERIES	33
LDR CSERIES	41

SISTEMI DI ILLUMINAZIONE PRINCIPALE


il sistema di illuminazione principale con i tagli di luce e stato progettato per sfruttare completamente il potenziale di installazione, facilitazione di installazione, e vari accessori per infinite composizioni

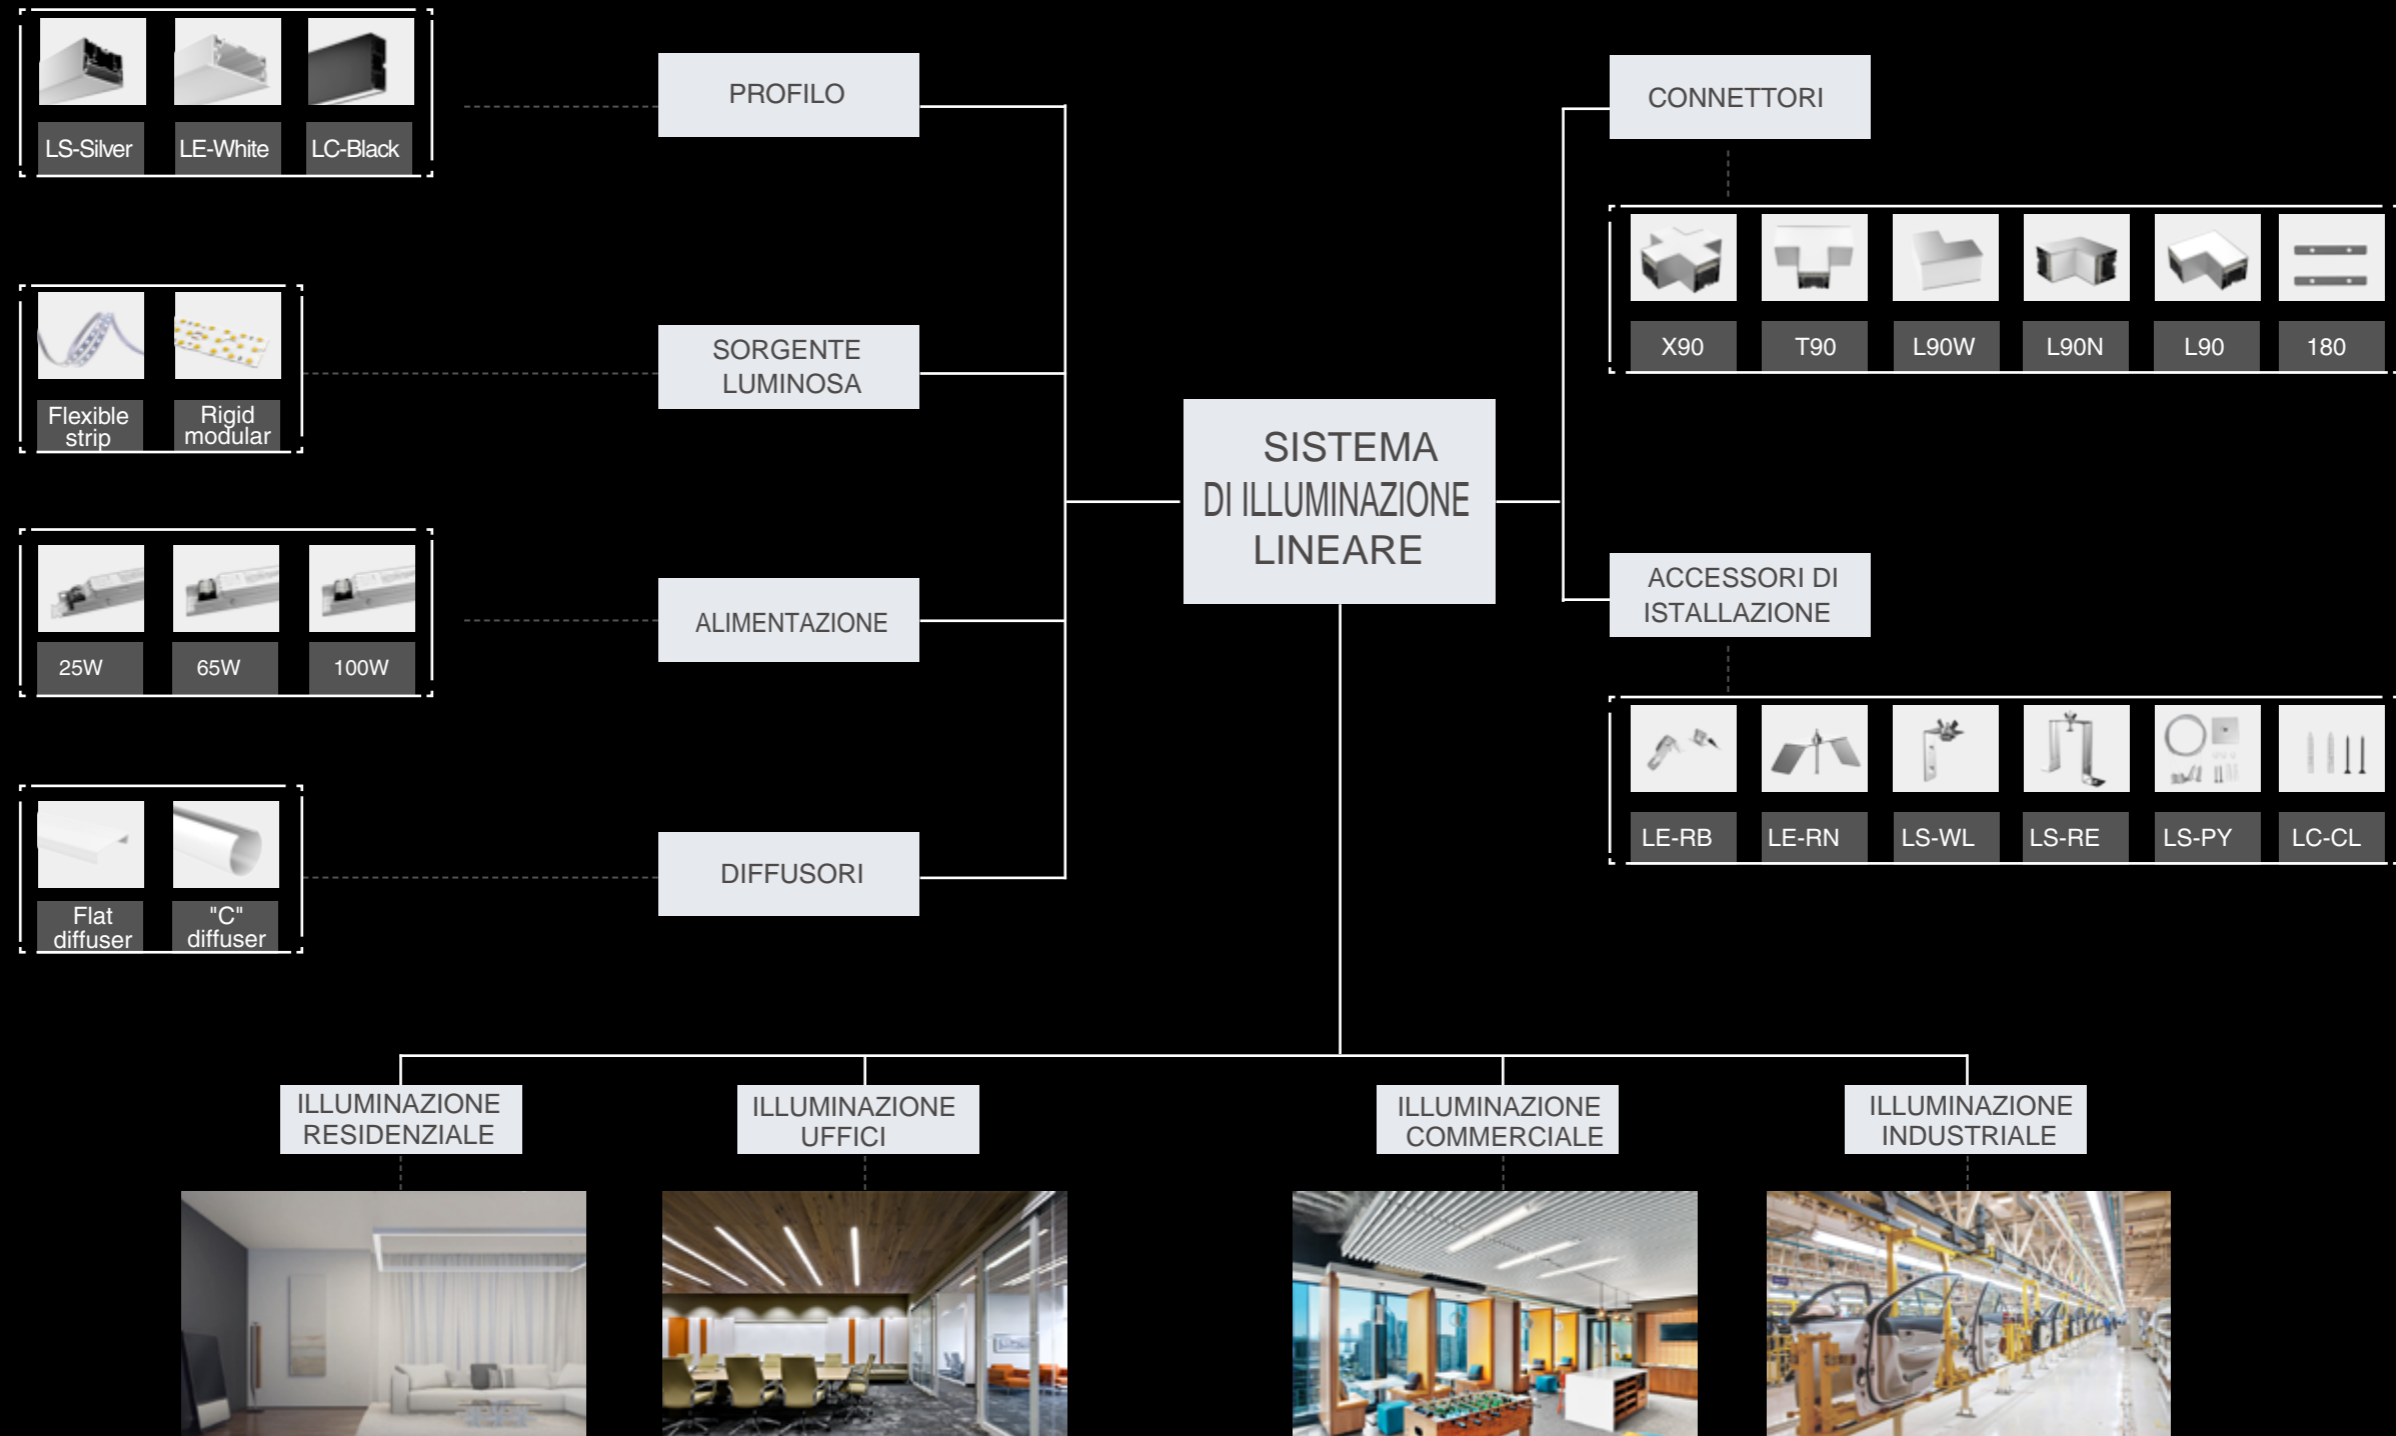



LIBERTA' NEL DISEGNO

E' facile creare stili di luce e di ottenere una grande flessibilità di progettazione illuminotecnica con la vasta gamma di prodotti di taglio, i collegamenti e le selezioni di colore, che offrono le migliori prestazioni del prodotto, e di personalizzazione

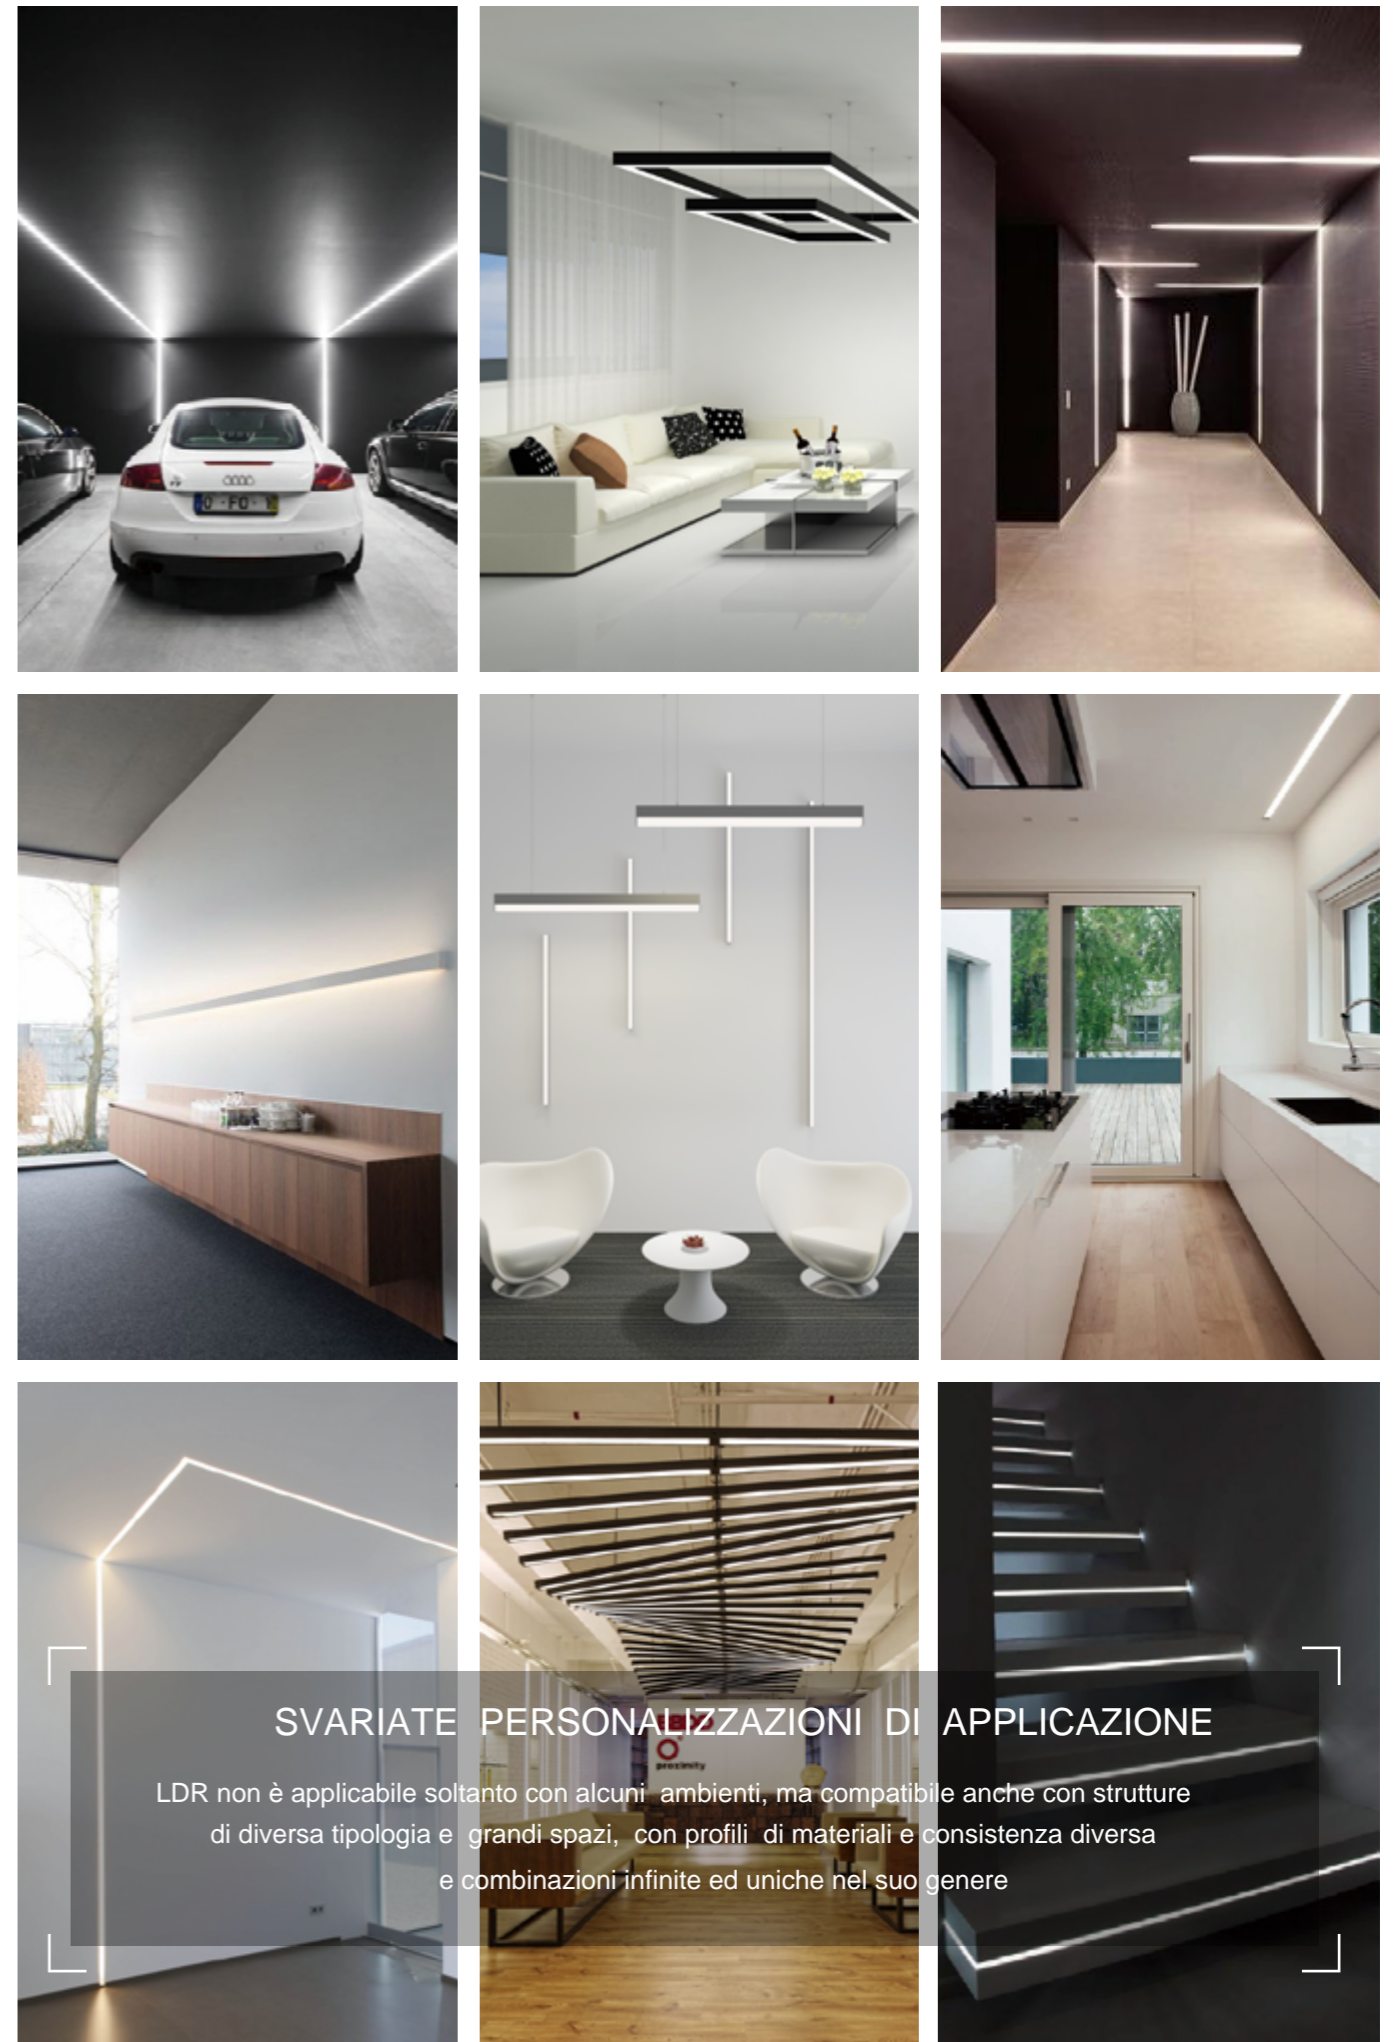


SVARIATE PERSONALIZZAZIONI DI APPLICAZIONE

LDR non è applicabile soltanto con alcuni ambienti, ma compatibile anche con strutture di diversa tipologia e grandi spazi, con profili di materiali e consistenza diversa e combinazioni infinite ed uniche nel suo genere



FACILITA' DI MANUTENZIONE

Rispetto ai prodotti simili, LDR ha migliorata significativamente l'efficienza d'installazione attraverso il risparmio di tempo del 40% nel disegno modulare, innovativo, di installazione e manutenzione pratica.

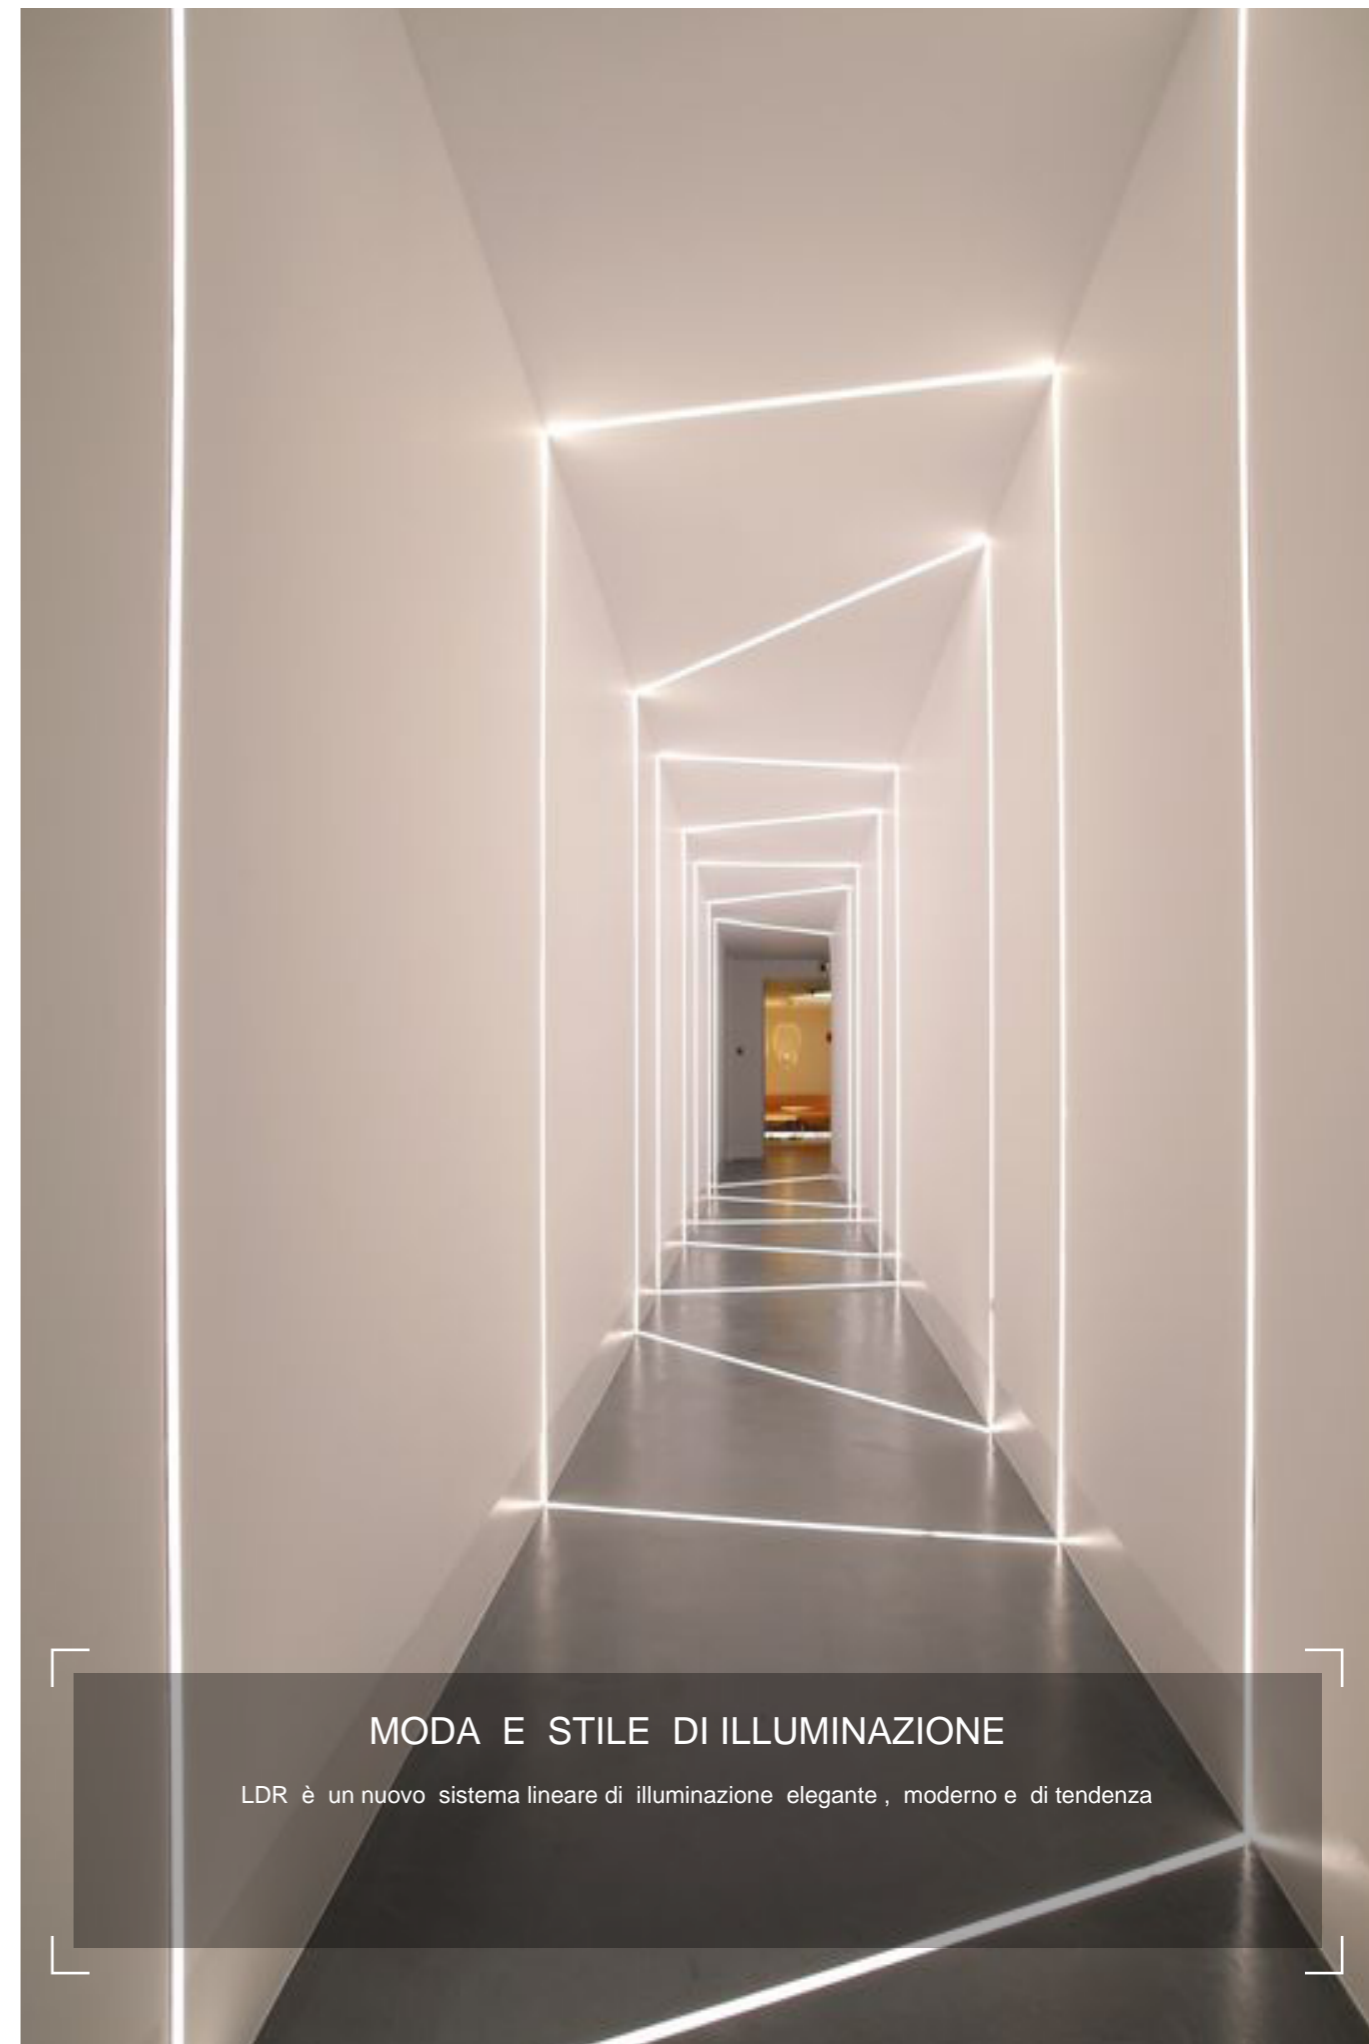


MODA E STILE DI ILLUMINAZIONE

LDR è un nuovo sistema lineare di illuminazione elegante, moderno e di tendenza





Qual'è la funzione LDR 2.0 ?

LDR 2.0 è il più recente sistema di illuminazione lineare progettato da LEDRICHPROJECT ha portato nuova tendenza alla progettazione di sistemi di illuminazione, ampia applicazione, libertà di collegamento del sistema lineare modulare, e un'installazione efficiente

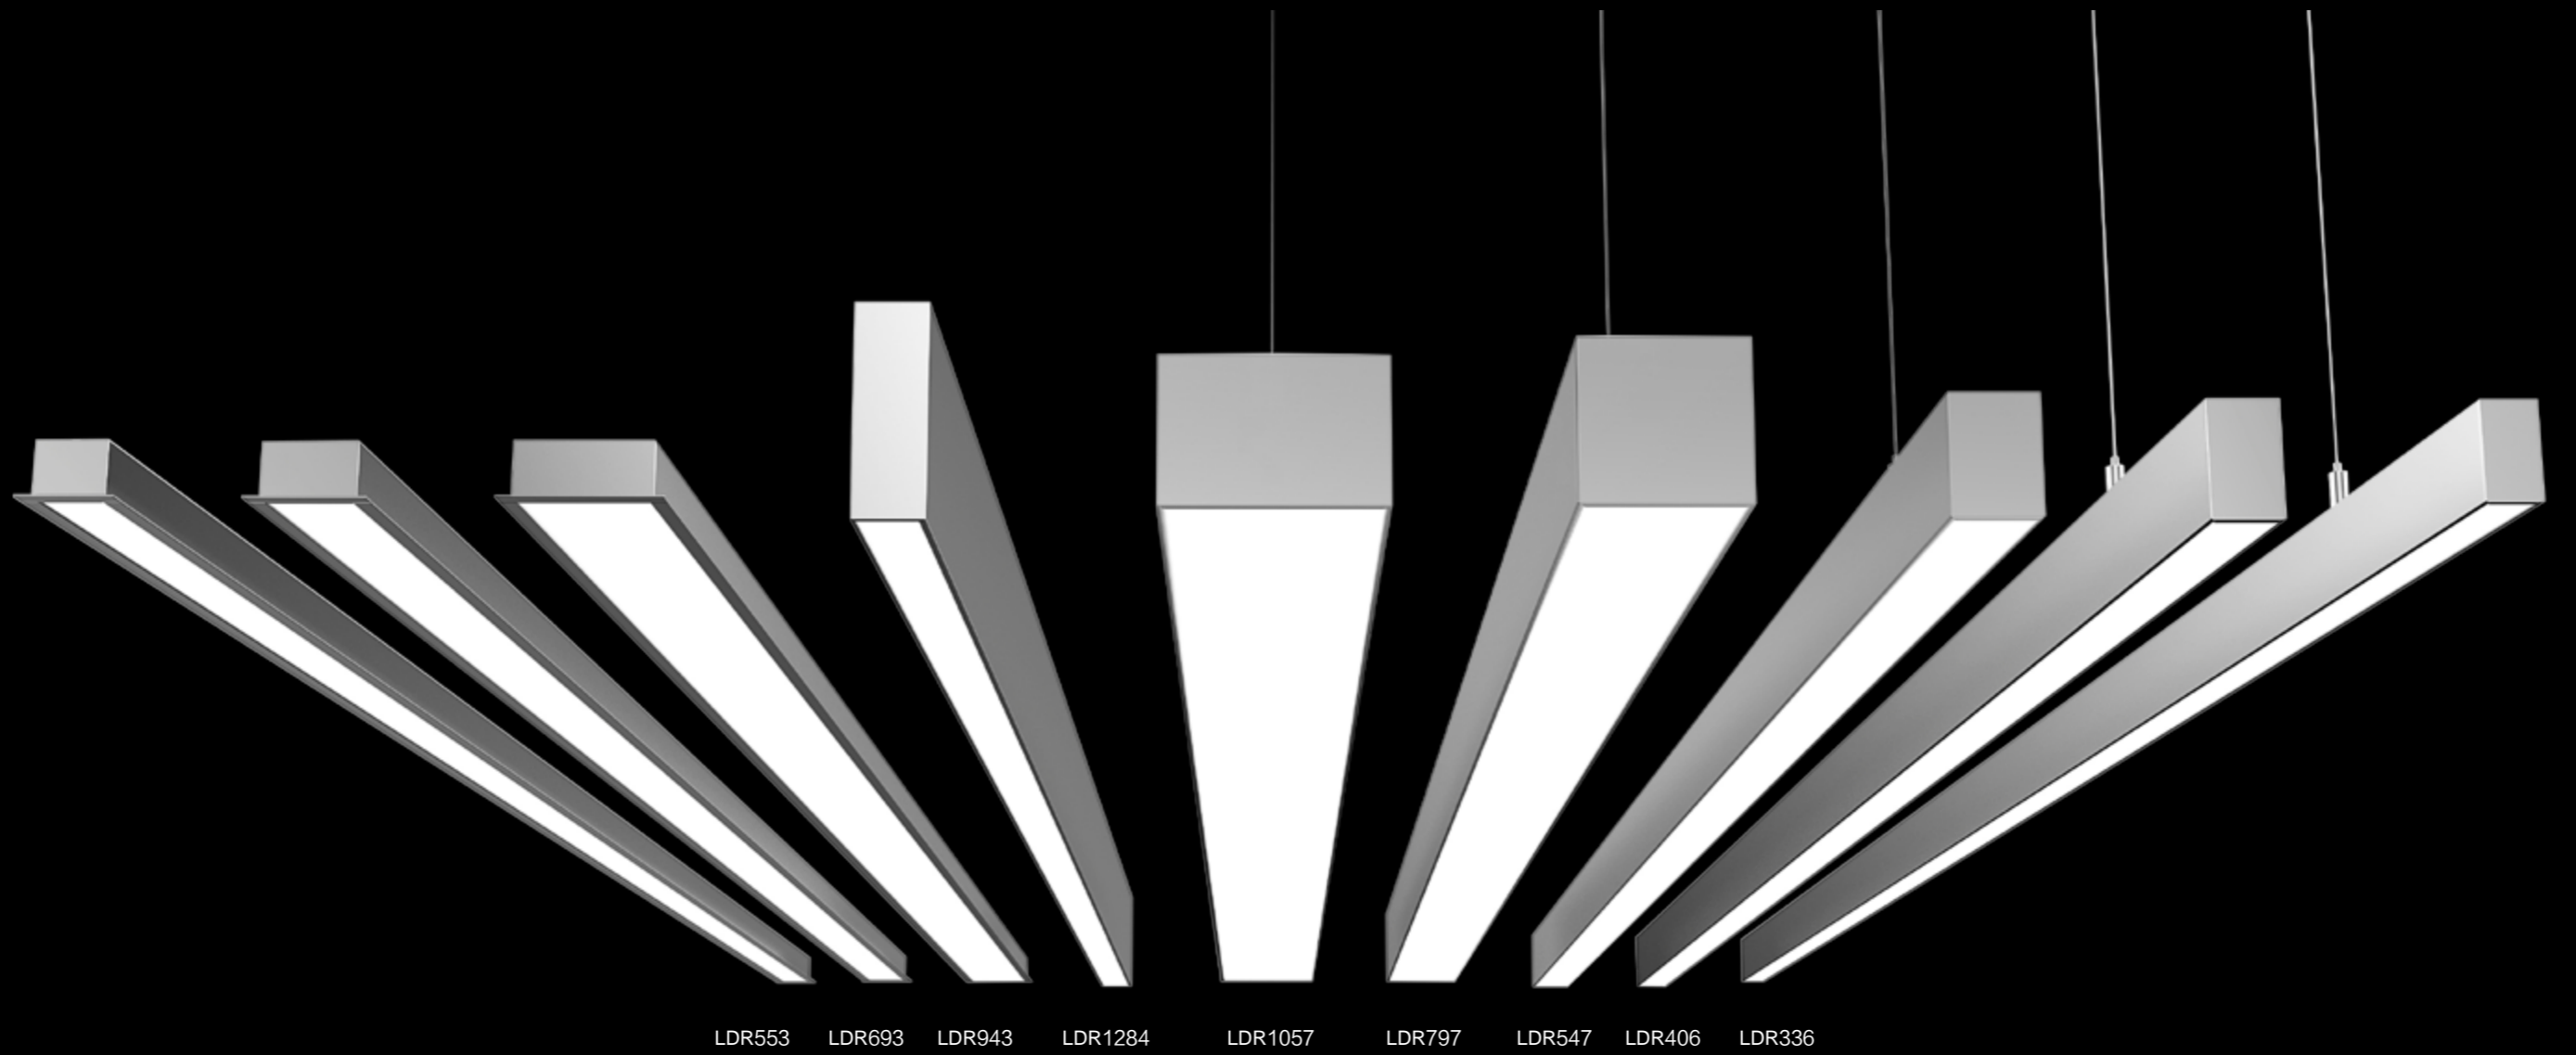


CONNETTORI STANDARD

cinque accessori copmleti senza taglio
connessione senza problemi con un design accattivante

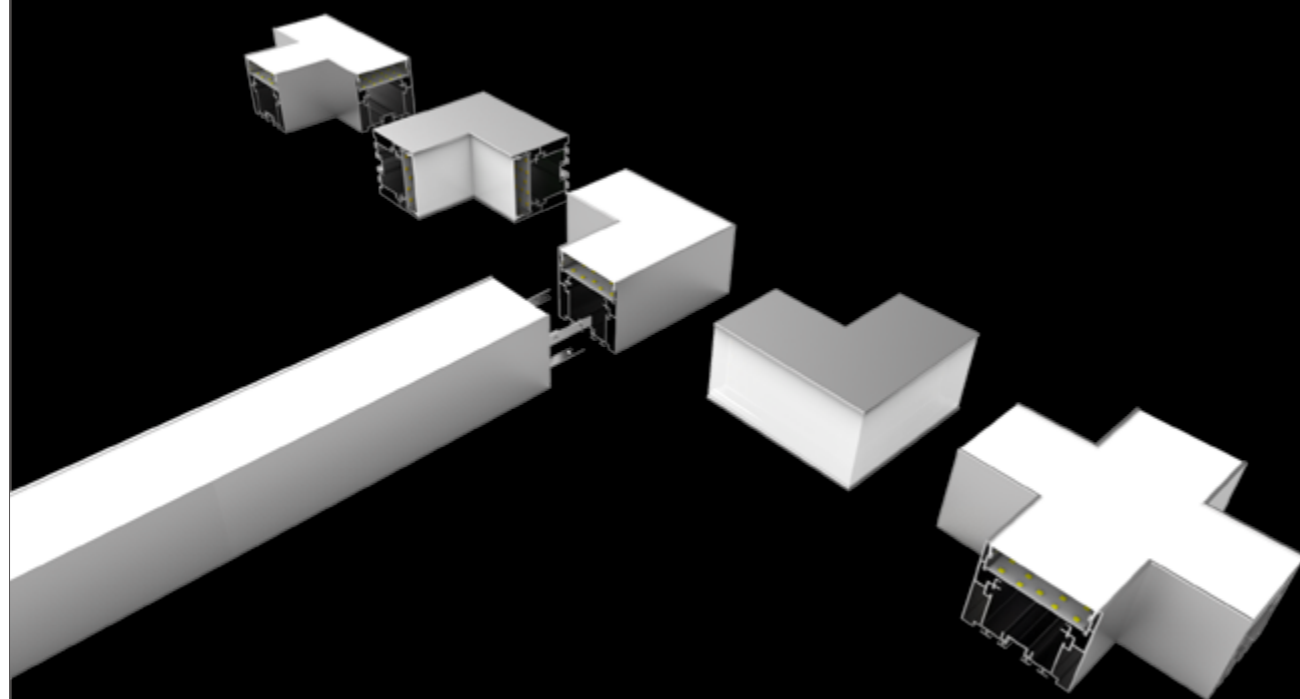


LIBERA CONNESSIONE

Sei modi di connessione per creare un numero illimitato
di affascinanti stili di spazio

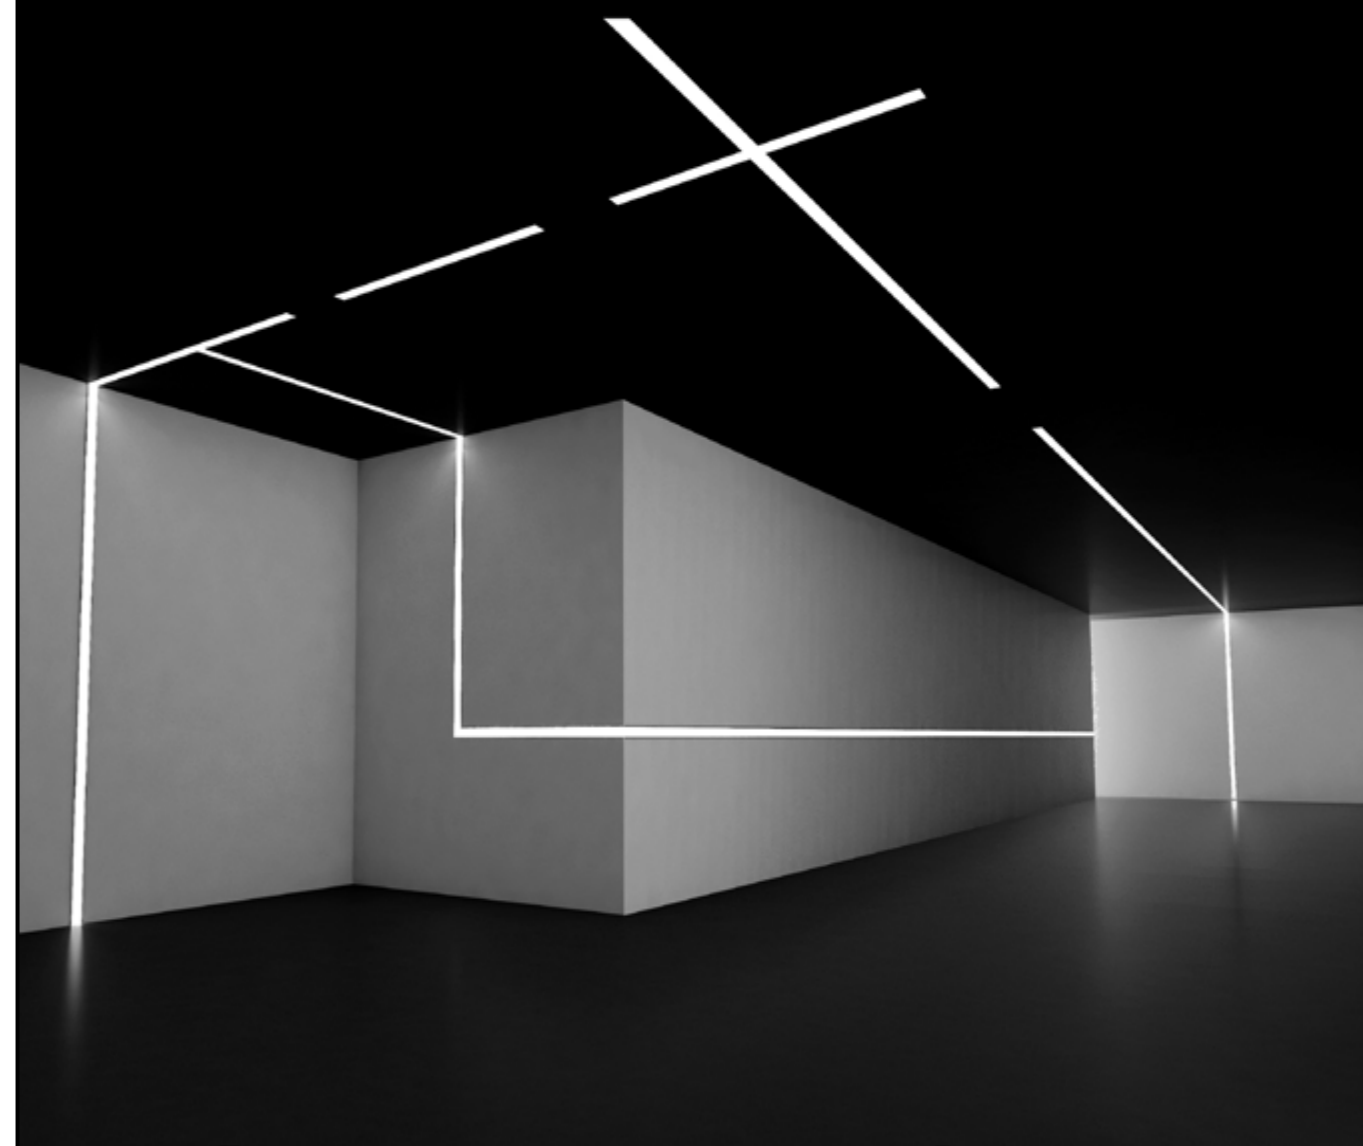


TAPPO DI ESTREMITA' MAGNETICO

Magnetic design, collegamento in pochi secondi
Minimalista e alla moda, giunzione senza viti

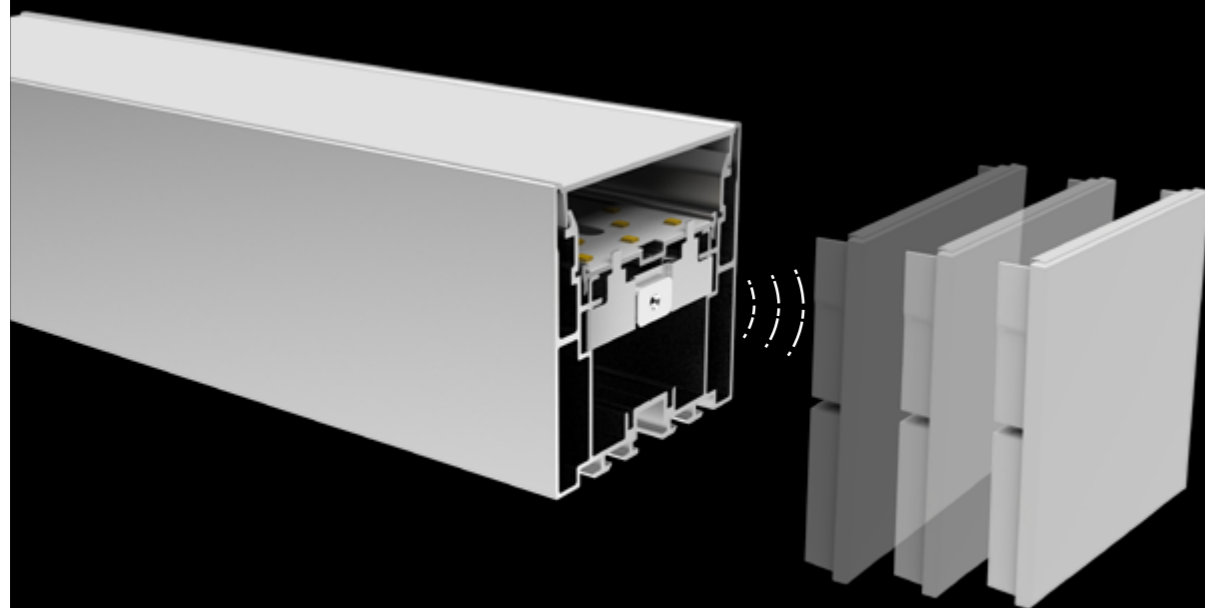

SUPPORTO TERMINALE



Supporto terminale removibile Creato per la rimozione del diffusore per una
maggiore comodità di manutenzione delle apparecchiature di illuminazione

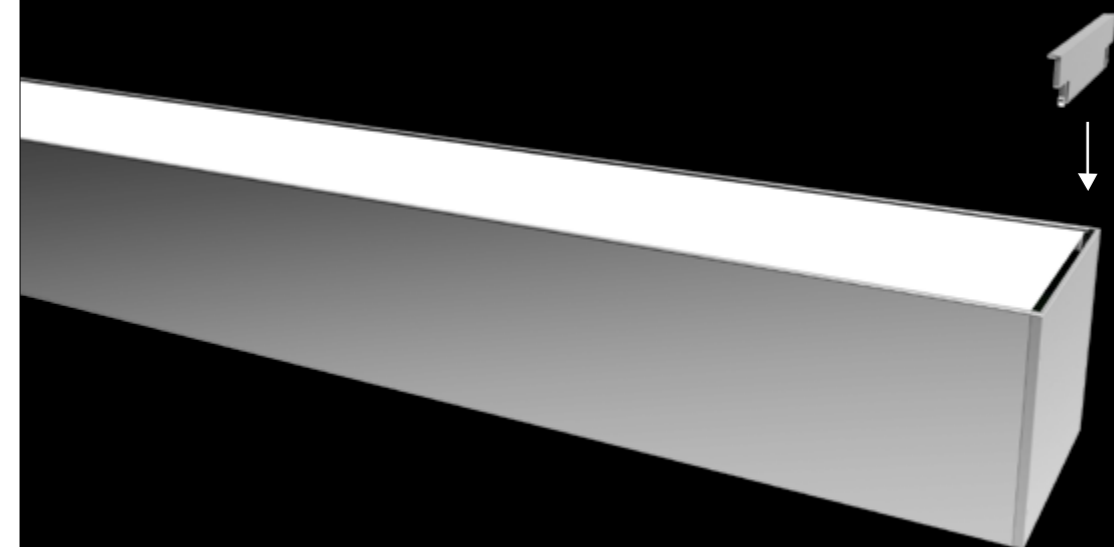

Strip Larghe per sistema Lineare

Striscia flessibile o rigida componibile su richiesta


differenti standard di temperatura colore

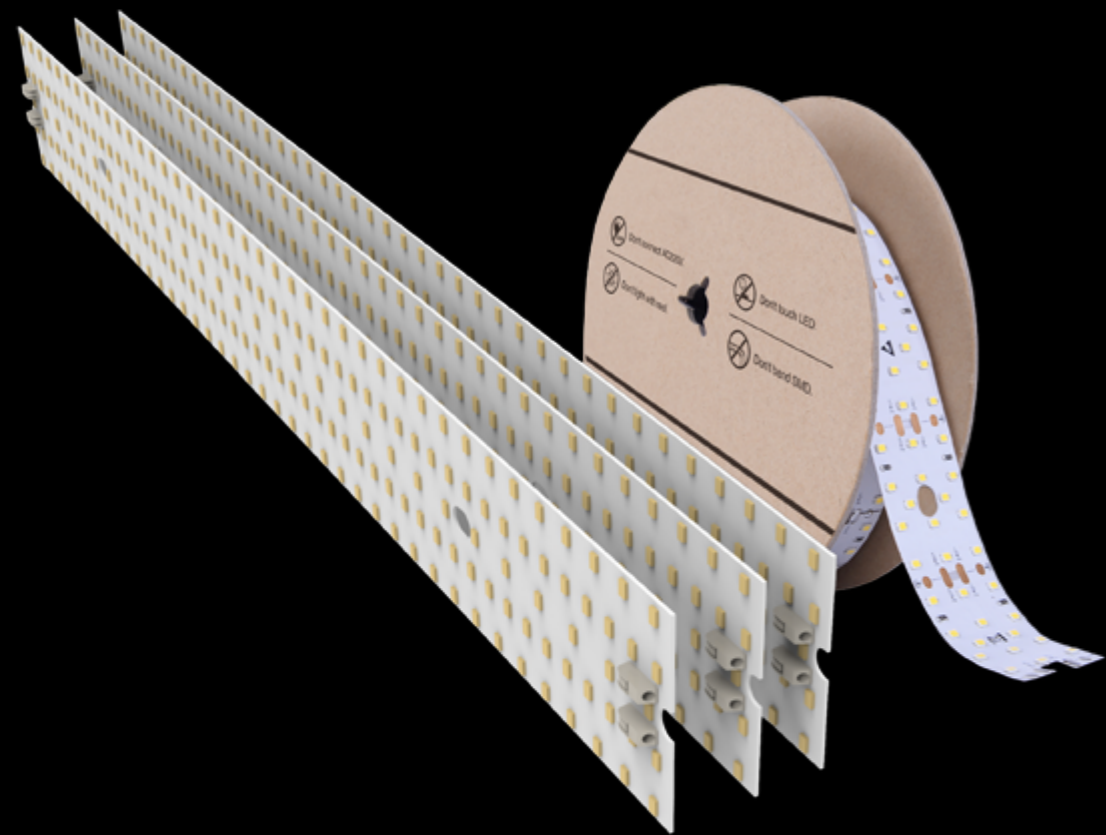

FACILE CONNESSIONE


facile connessione, inserire per collegare

montare e smontare

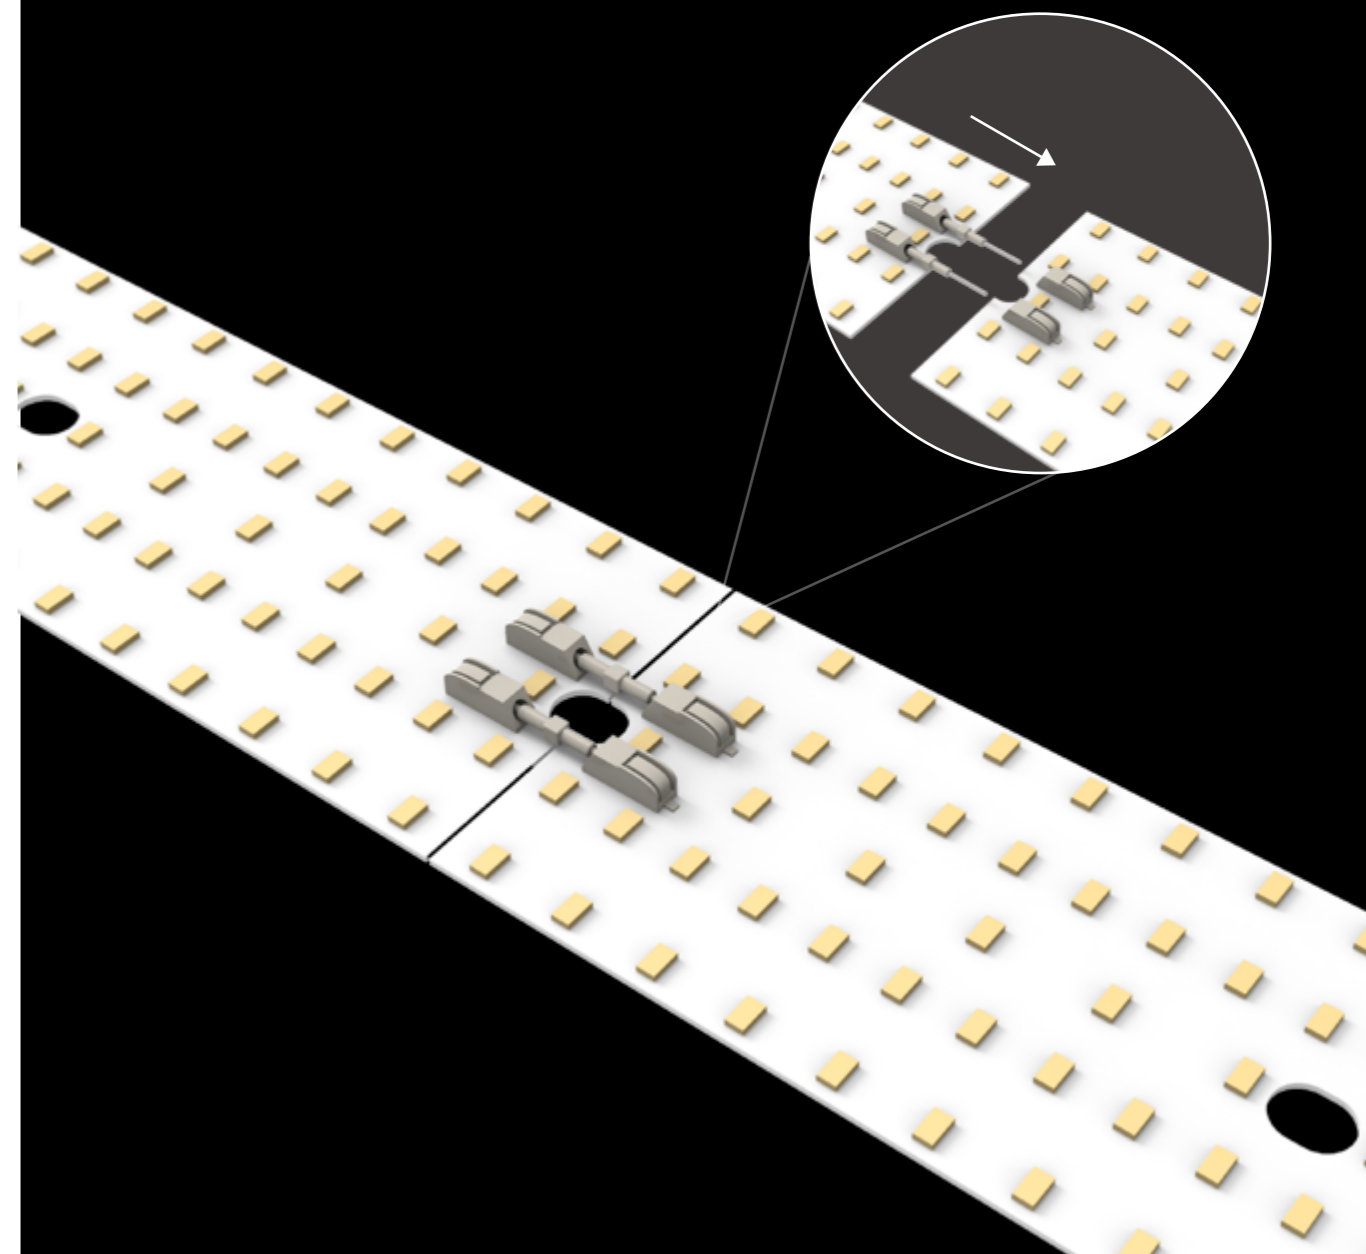


SUPPORTO DISSIPANTE PER STRIP

Supporto di facile installazione, montaggio e smontaggio
risparmio di tempo e difficoltà inferiore del 40% rispetto
agli altri profili, in caso di problemi alla strip led, il supporto può
essere smontato e sceso fino a terra

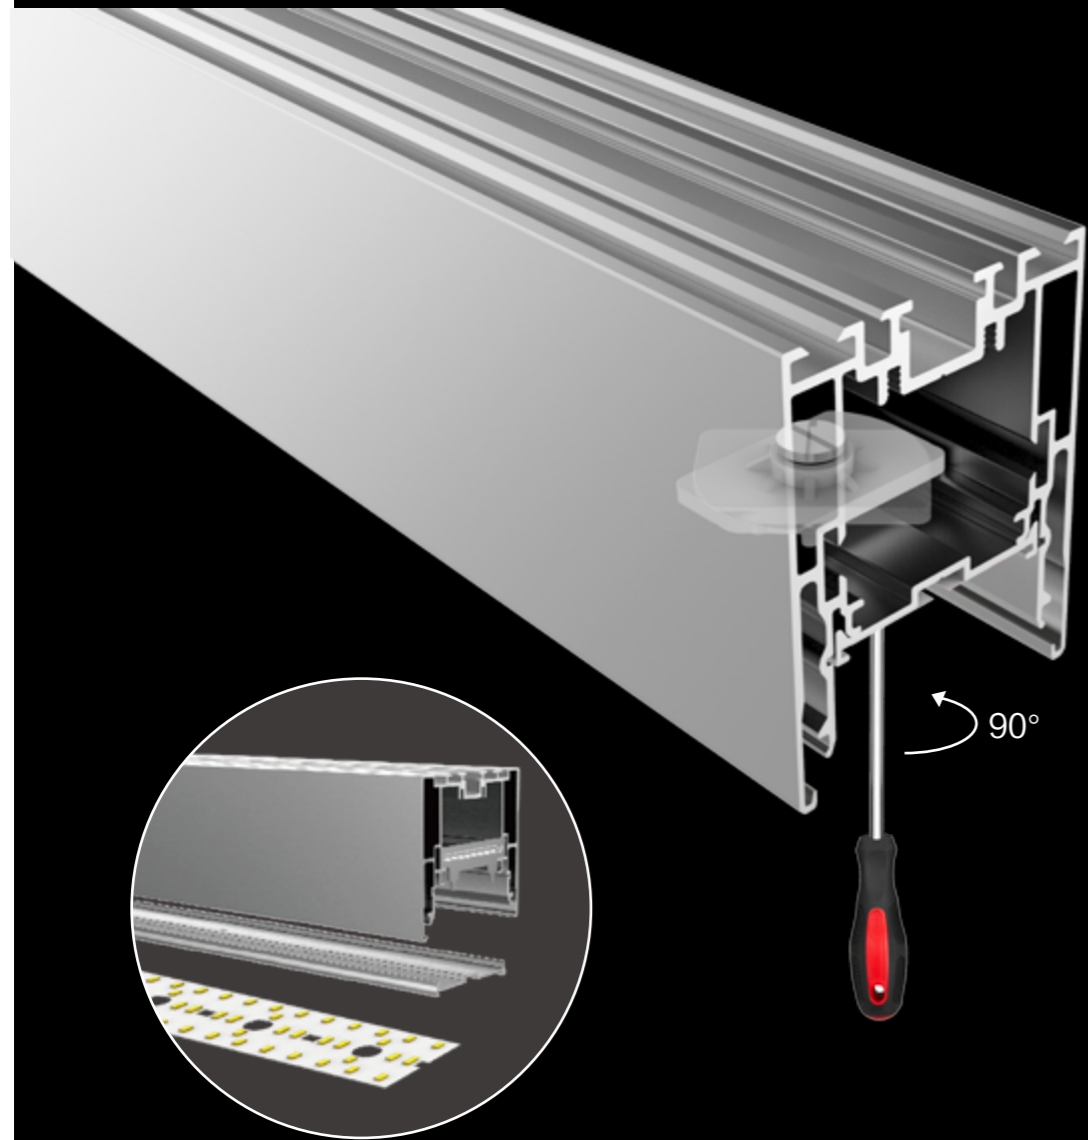

ALIMENTATORE SLIM

Alimentatore Slim in tensione Costante tre opzioni di potenza
perfettamente integrante nel taglio di luce

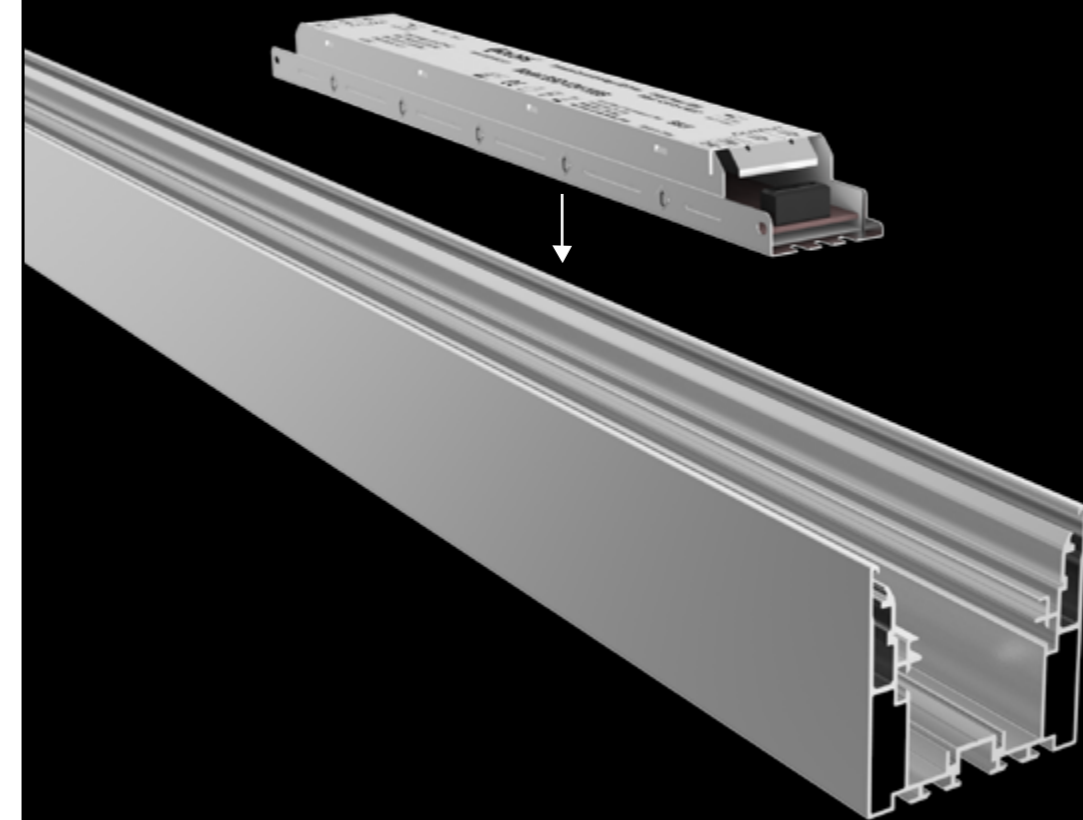

3-in-1 DIMMING


High quality linear power supply
with dim freely, built into the linear luminaires design




+ PWM



+ 0-10V



+ RESISTOR




100%



50%

VARI MODI DI INSTALLAZIONE

Vari opzioni di montaggio

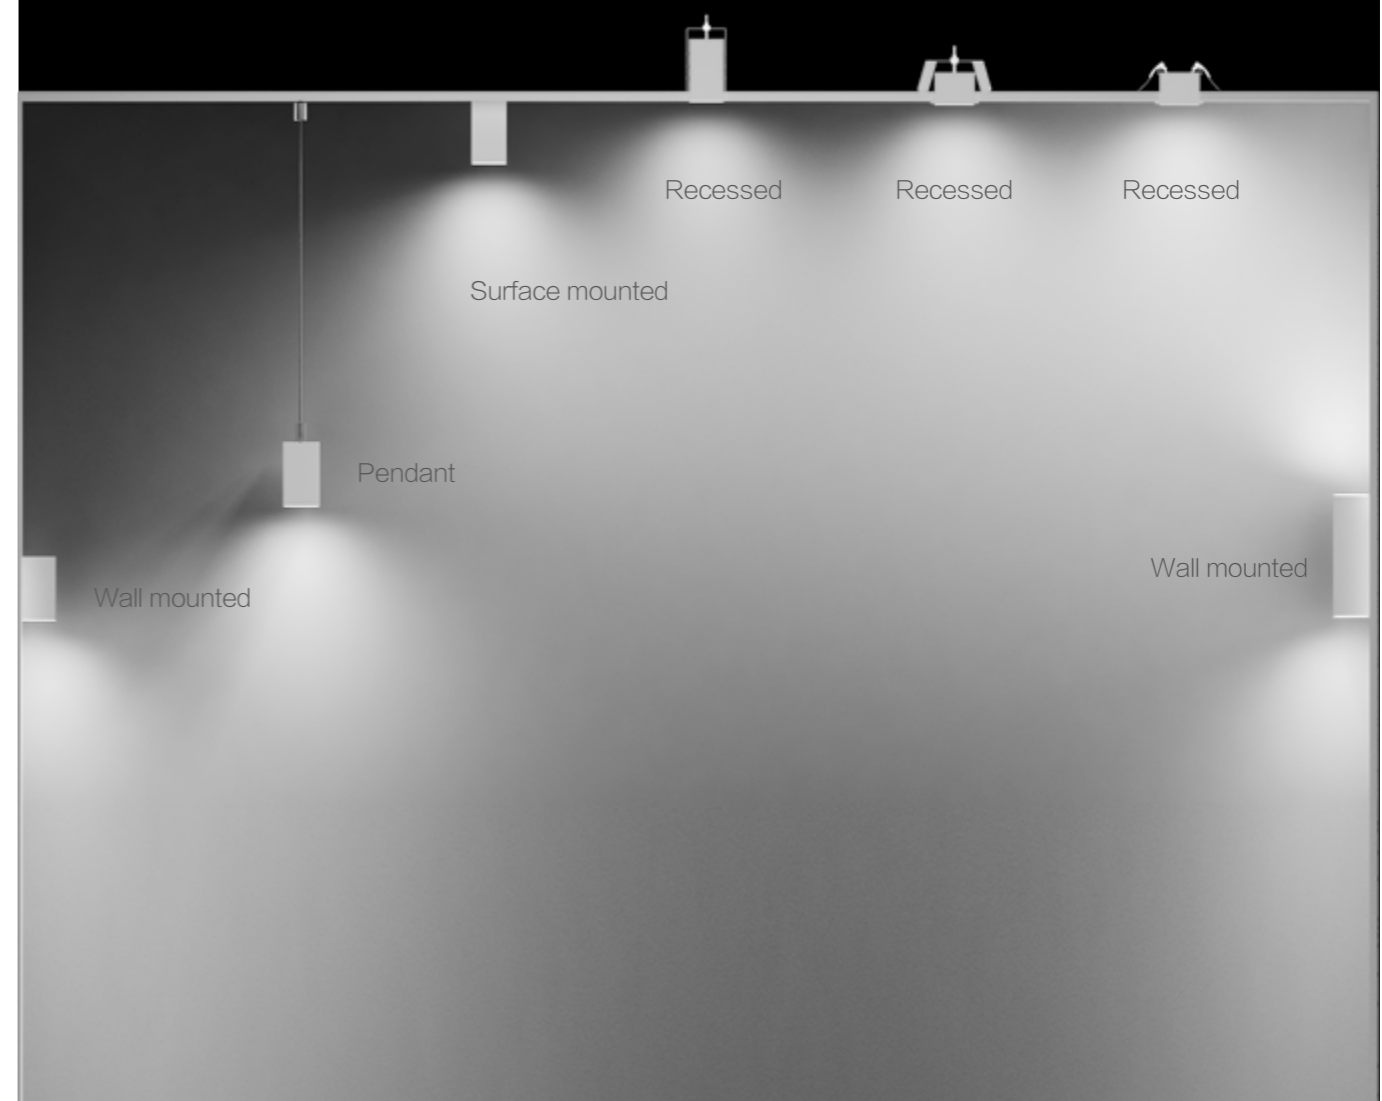

LDR SERIES


Profili di diversi tipi di applicazioni di montaggio incasso,
montaggio in superficie, montaggio a sospensione,
facile installazione ,tappo terminale con chiusura magnetica
possibilità di inserimento alimentatore interno




LDR336




LDR406



LDR547




LDR797



LDR1057



LDR 353

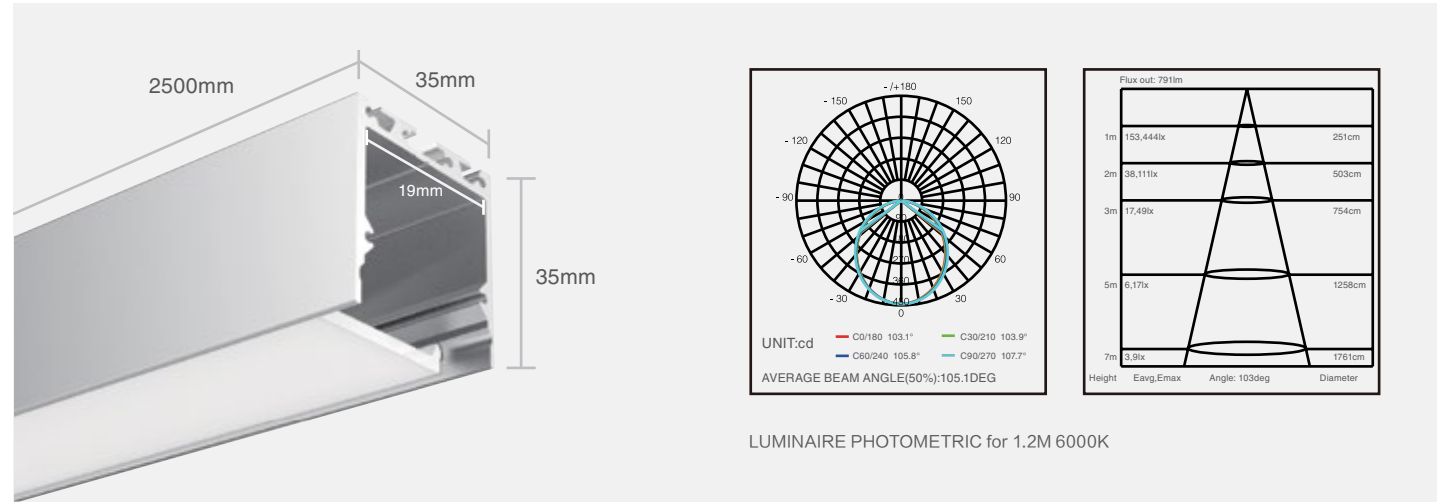


Standard





Optional



LDR336

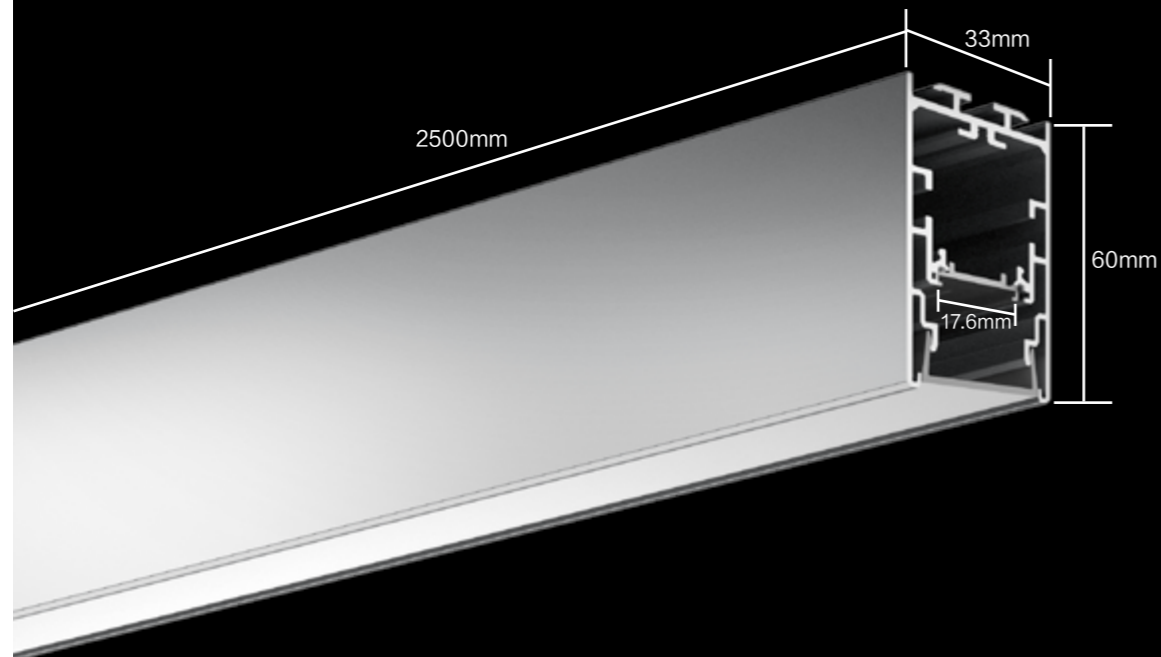

PHOTOMETRIC OF 1.2M LUMINAIRE

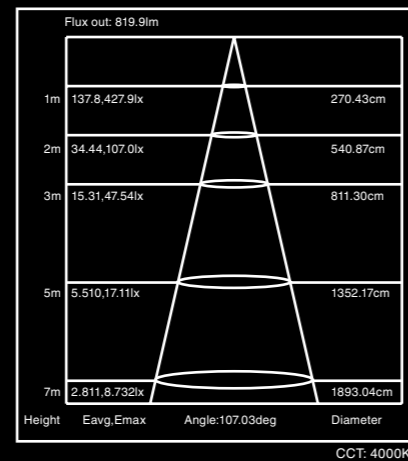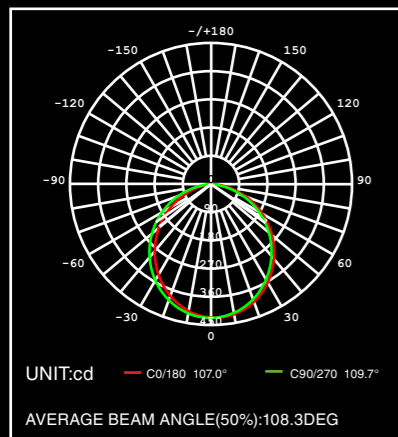

Profile	Profile
Material	Aluminium 6063
Standard coating	Silver Anodization
Optional coating	White /Black Powder Coating

Essential

End cap x2	LDR336-EC 33x60x11.5mm	
Diffuser x1	LDR336-CV 2500mm	
Quick locker x4	LDR336-BK 22x14x13mm	
Screw set x3	LDR336-CL M3.5x40mm	
Cable clip	LDR336-BG	

Lighting Source and Power Supply *

Flexible strip	LDR828-15 2500x15x1.7mm	
Rigid modular	LDR828-17 249/299/499x17x5.6mm	
25W power supply	LDR-V24-025 330x21x20mm	

Installation Accessories *


Pendant cable with junction box	LDR336-PY 2m/4m	
Pendant cable	LDR336-PN 2m/4m	
Recessed buckle	LDR336-RE 89x25x75mm	
Wall-mounted buckle	LDR336-WL 50x18x34mm	

Connectors *



180° extender	LDR336-180 55x10x2mm	
"L"-type light corner	LDR336-L90 100x100x60mm	
"L"-type light corner (inner)	LDR336-L90N 100x100x33mm	
"L"-type light corner (exterior)	LDR336-L90W 100x100x33mm	
"T"-type light corner	LDR336-T90 150x100x60mm	
"X"-type light corner	LDR336-X90 150x150x60mm	

* Optional parts


LDR406

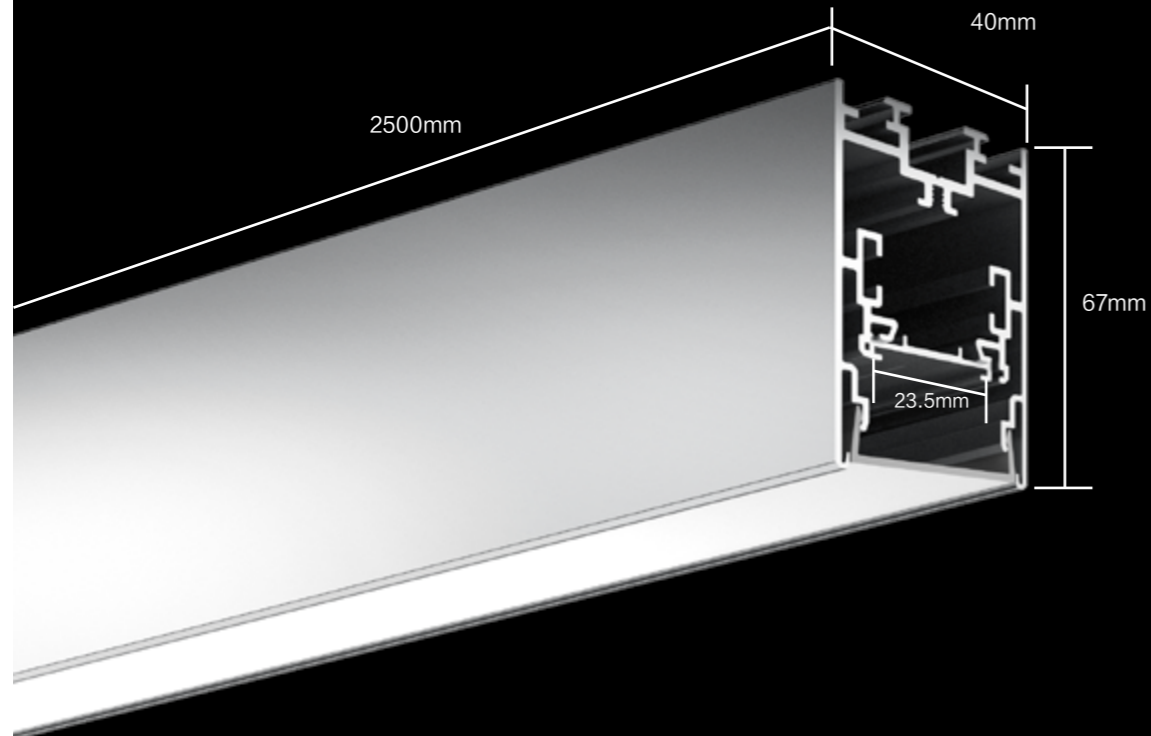

PHOTOMETRIC OF 1.2M LUMINAIRE

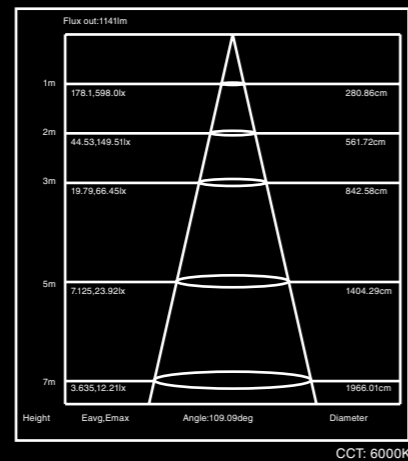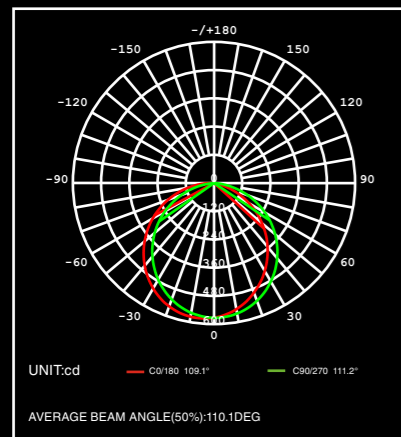

CCT: 6000K

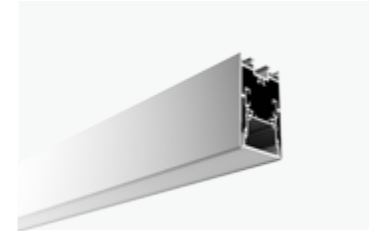

Profile	Profile
Material	Aluminium 6063
Standard coating	Silver Anodization
Optional coating	White /Black Powder Coating

Essential

End cap x2	LDR406-EC 40x67x11.5mm	
Diffuser x1	LDR406-CV 2500mm	
Quick locker x4	LDR406-BK 22x14x13mm	
Screw set x3	LDR406-CL M3.5x40mm	
Cable clip	LDR406-BG	

Lighting Source and Power Supply *

Flexible strip	LDR828-20 2500x20x1.7mm	
Rigid modular	LDR828-23 249/299/499x23x5.6mm	
25W power supply	LDR-V24-025 330x21x20mm	

Installation Accessories *


Pendant cable with junction box	LDR406-PY 2m/4m	
Pendant cable	LDR406-PN 2m/4m	
Recessed buckle	LDR406-RE 96x25x79mm	
Wall-mounted buckle	LDR406-WL 50x18x34mm	

Connectors *




180° extender	LDR406-180 55x10x2mm	
"L"-type light corner	LDR406-L90 100x100x67mm	
"L"-type light corner (inner)	LDR406-L90N 100x100x40mm	
"L"-type light corner (exterior)	LDR406-L90W 150x150x40mm	
"T"-type light corner	LDR406-T90 150x100x67mm	
"X"-type light corner	LDR406-X90 150x150x67mm	

* Optional parts

LDR547

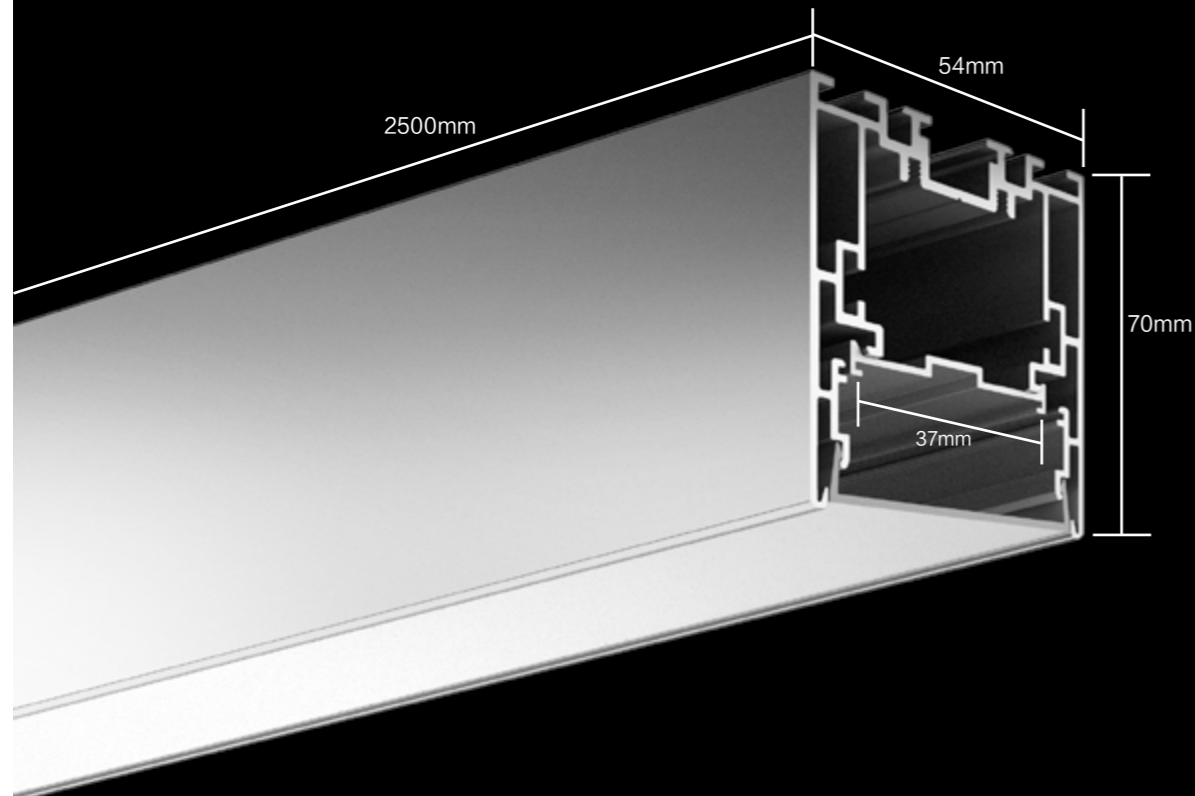

PHOTOMETRIC OF 1.2M LUMINAIRE

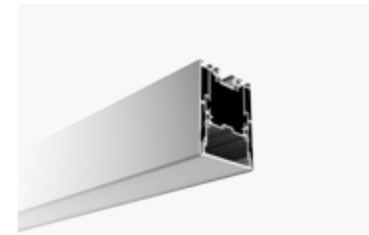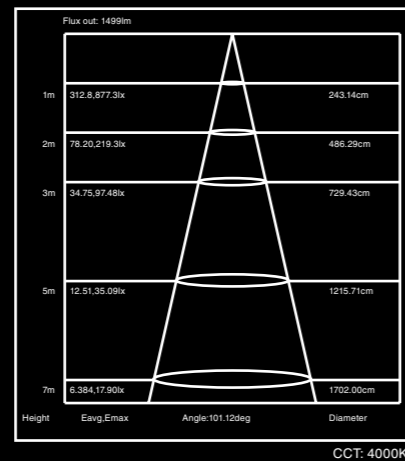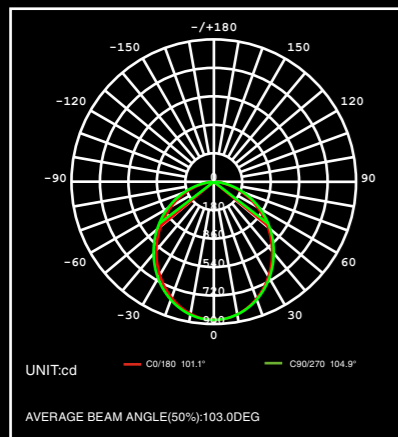

Profile	Profile
Material	Aluminium 6063
Standard coating	Silver Anodization
Optional coating	White /Black Powder Coating

Essential

End cap x2	LDR547-EC 54x70x11.5mm	
Diffuser x1	LDR547-CV 2500mm	
Quick locker x4	LDR547-BK 32x22x13mm	
Screw set x3	LDR547-CL M3.5x40mm	
Cable clip	LDR547-BG	

Lighting Source and Power Supply *

Flexible strip	LDR828-34 2500x34x1.7mm	
Rigid modular	LDR828-36 299/499x36x5.6mm	
65W power supply	LDR-V24-065 363x34.5x22.5mm	

Installation Accessories *


Pendant cable with junction box	LDR547-PY 2m/4m	
Pendant cable	LDR547-PN 2m/4m	
Recessed buckle	LDR547-RE 110x25x82mm	
Wall-mounted buckle	LDR547-WL 50x18x34mm	

Connectors *



180° extender	LDR547-180 55x10x2mm	
"L"-type light corner	LDR547-L90 100x100x70mm	
"L"-type light corner (inner)	LDR547-L90N 100x100x54mm	
"L"-type light corner (exterior)	LDR547-L90W 150x150x54mm	
"T"-type light corner	LDR547-T90 150x100x70mm	
"X"-type light corner	LDR547-X90 150x150x70mm	

* Optional parts

LDR797

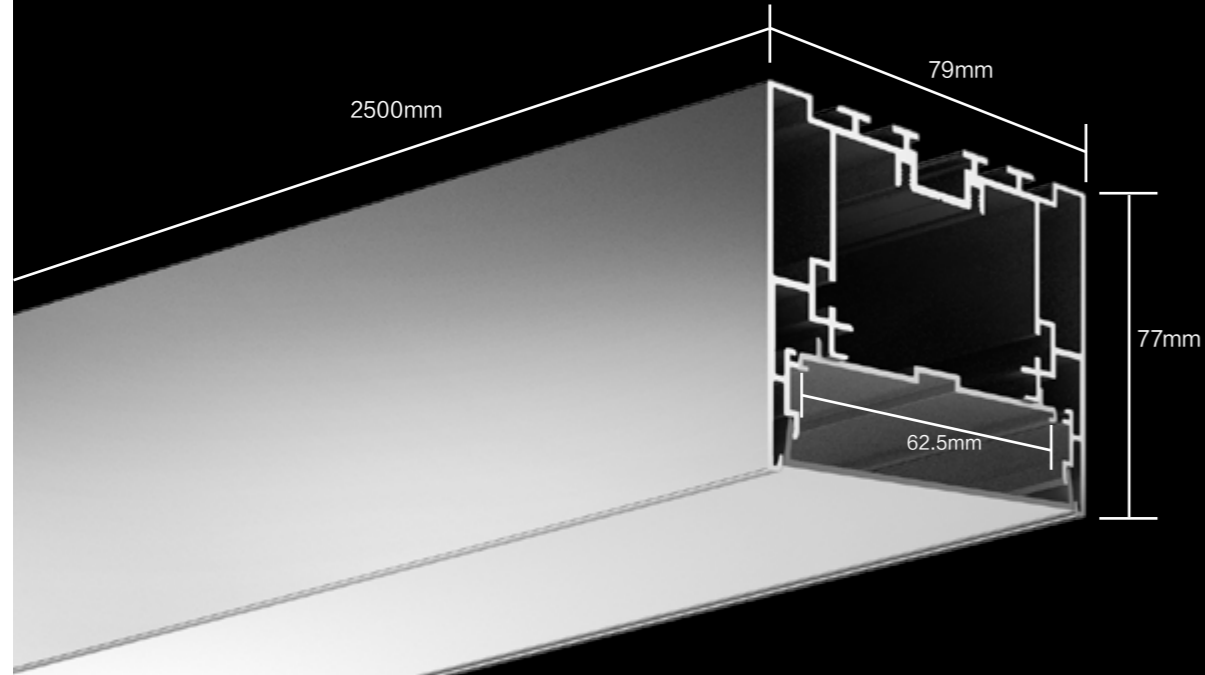

PHOTOMETRIC OF 1.2M LUMINAIRE

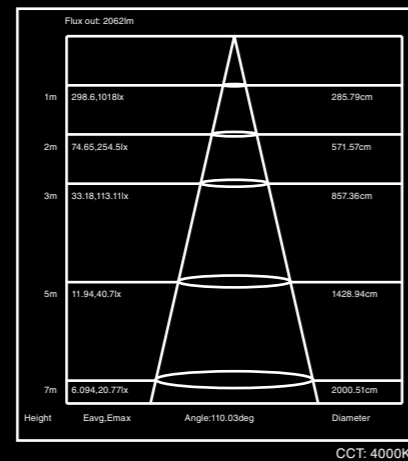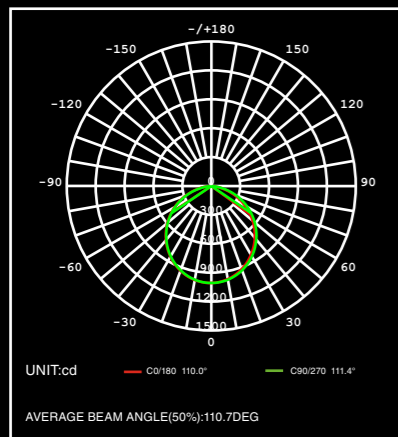

Profile	Profile
Material	Aluminium 6063
Standard coating	Silver Anodization
Optional coating	White /Black Powder Coating

Essential

End cap x2	LDR797-EC 79x77x11.5mm	
Diffuser x1	LDR797-CV 2500mm	
Quick locker x4	LDR797-BK 32x49x13mm	
Screw set x3	LDR797-CL M3.5x40mm	
Cable clip	LDR797-BG	

Lighting Source and Power Supply *

Flexible strip	LDR842-59 2500x59x1.7mm	
Rigid modular	LDR842-62 299/499x62x5.6mm	
100W power supply	LDR-V24-100 390x38x28.5mm	

Installation Accessories *


Pendant cable with junction box	LDR797-PY 2m/4m	
Pendant cable	LDR797-PN 2m/4m	
Recessed buckle	LDR797-RE 135.4x25x90mm	

Connectors *



180° extender	LDR797-180 55x10x2mm	
"L"-type light corner	LDR797-L90 150x150x77mm	
"L"-type light corner (inner)	LDR797-L90N 150x150x79mm	
"L"-type light corner (exterior)	LDR797-L90W 150x150x79mm	
"T"-type light corner	LDR797-T90 200x150x77mm	
"X"-type light corner	LDR797-X09 200x200x77mm	

* Optional parts


LDR1057

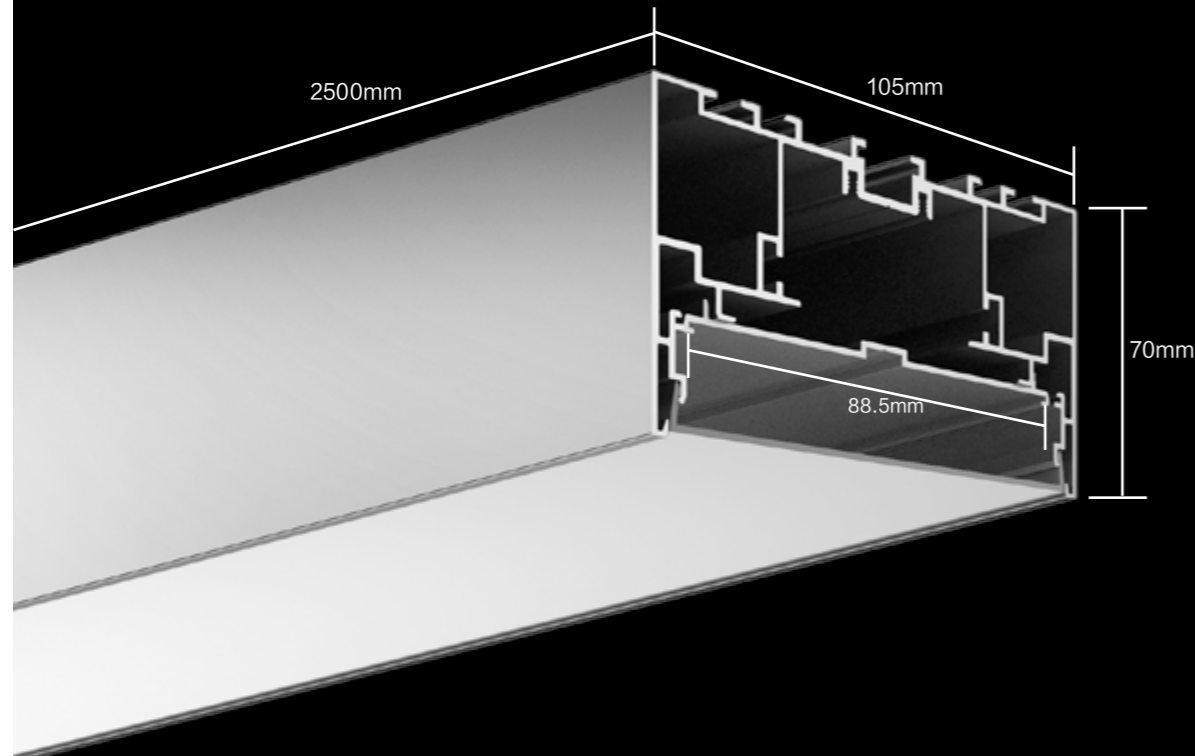

PHOTOMETRIC OF 1.2M LUMINAIRE

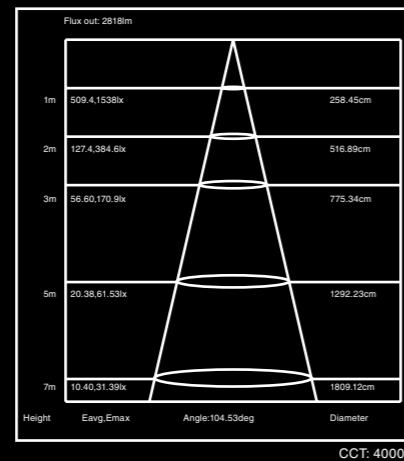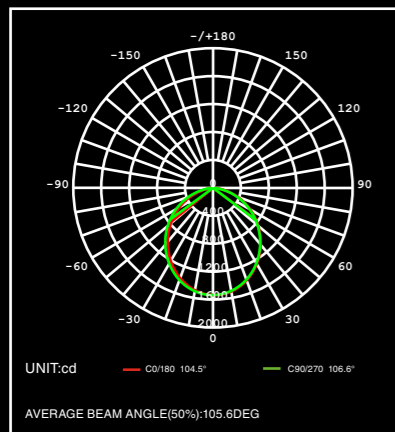

CCT: 4000K

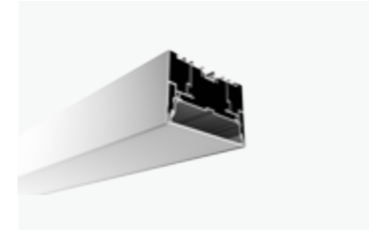

Profile	Profile
Material	Aluminium 6063
Standard coating	Silver Anodization
Optional coating	White /Black Powder Coating

Essential

End cap x2	LDR1057-EC 105x70x11.5mm	
Diffuser x1	LDR1057-CV 2500mm	
Quick locker x4	LDR1057-BK 32x49x13mm	
Screw set x3	LSDR057-CL M3.5x40mm	
Cable clip	LDR1057-BG	

Lighting Source and Power Supply *

Flexible strip	LDR856-85 2500x85x1.7mm	
Rigid modular	LDR856-88 299/499x88x5.6mm	
100W power supply	LDR-V24-100 390x38x28.5mm	

Installation Accessories *

Pendant cable with junction box	LDR1057-PY 2m/4m	
Pendant cable	LDR1057-PN 2m/4m	
Recessed buckle	LDR1057-RE 161.4x25x83mm	

Connectors *

180° extender	LDR1057-180 55x10x2mm	
"L"-type light corner	LDR1057-L90 150x150x70mm	
"L"-type light corner (inner)	LDR1057-L09N 150x150x105mm	
"L"-type light corner (exterior)	LDR1057-L90W 150x150x105mm	
"T"-type light corner	LDR1057-T90 200x150x70mm	
"X"-type light corner	LDR1057-X90 200x200x70mm	


* Optional parts




LDR SERIE

Profili lineari ad incasso, facile installazione e manutenzione

Tappi di chiusura ad installazione magnetica




LDR 553




LDR 693





LDR 943

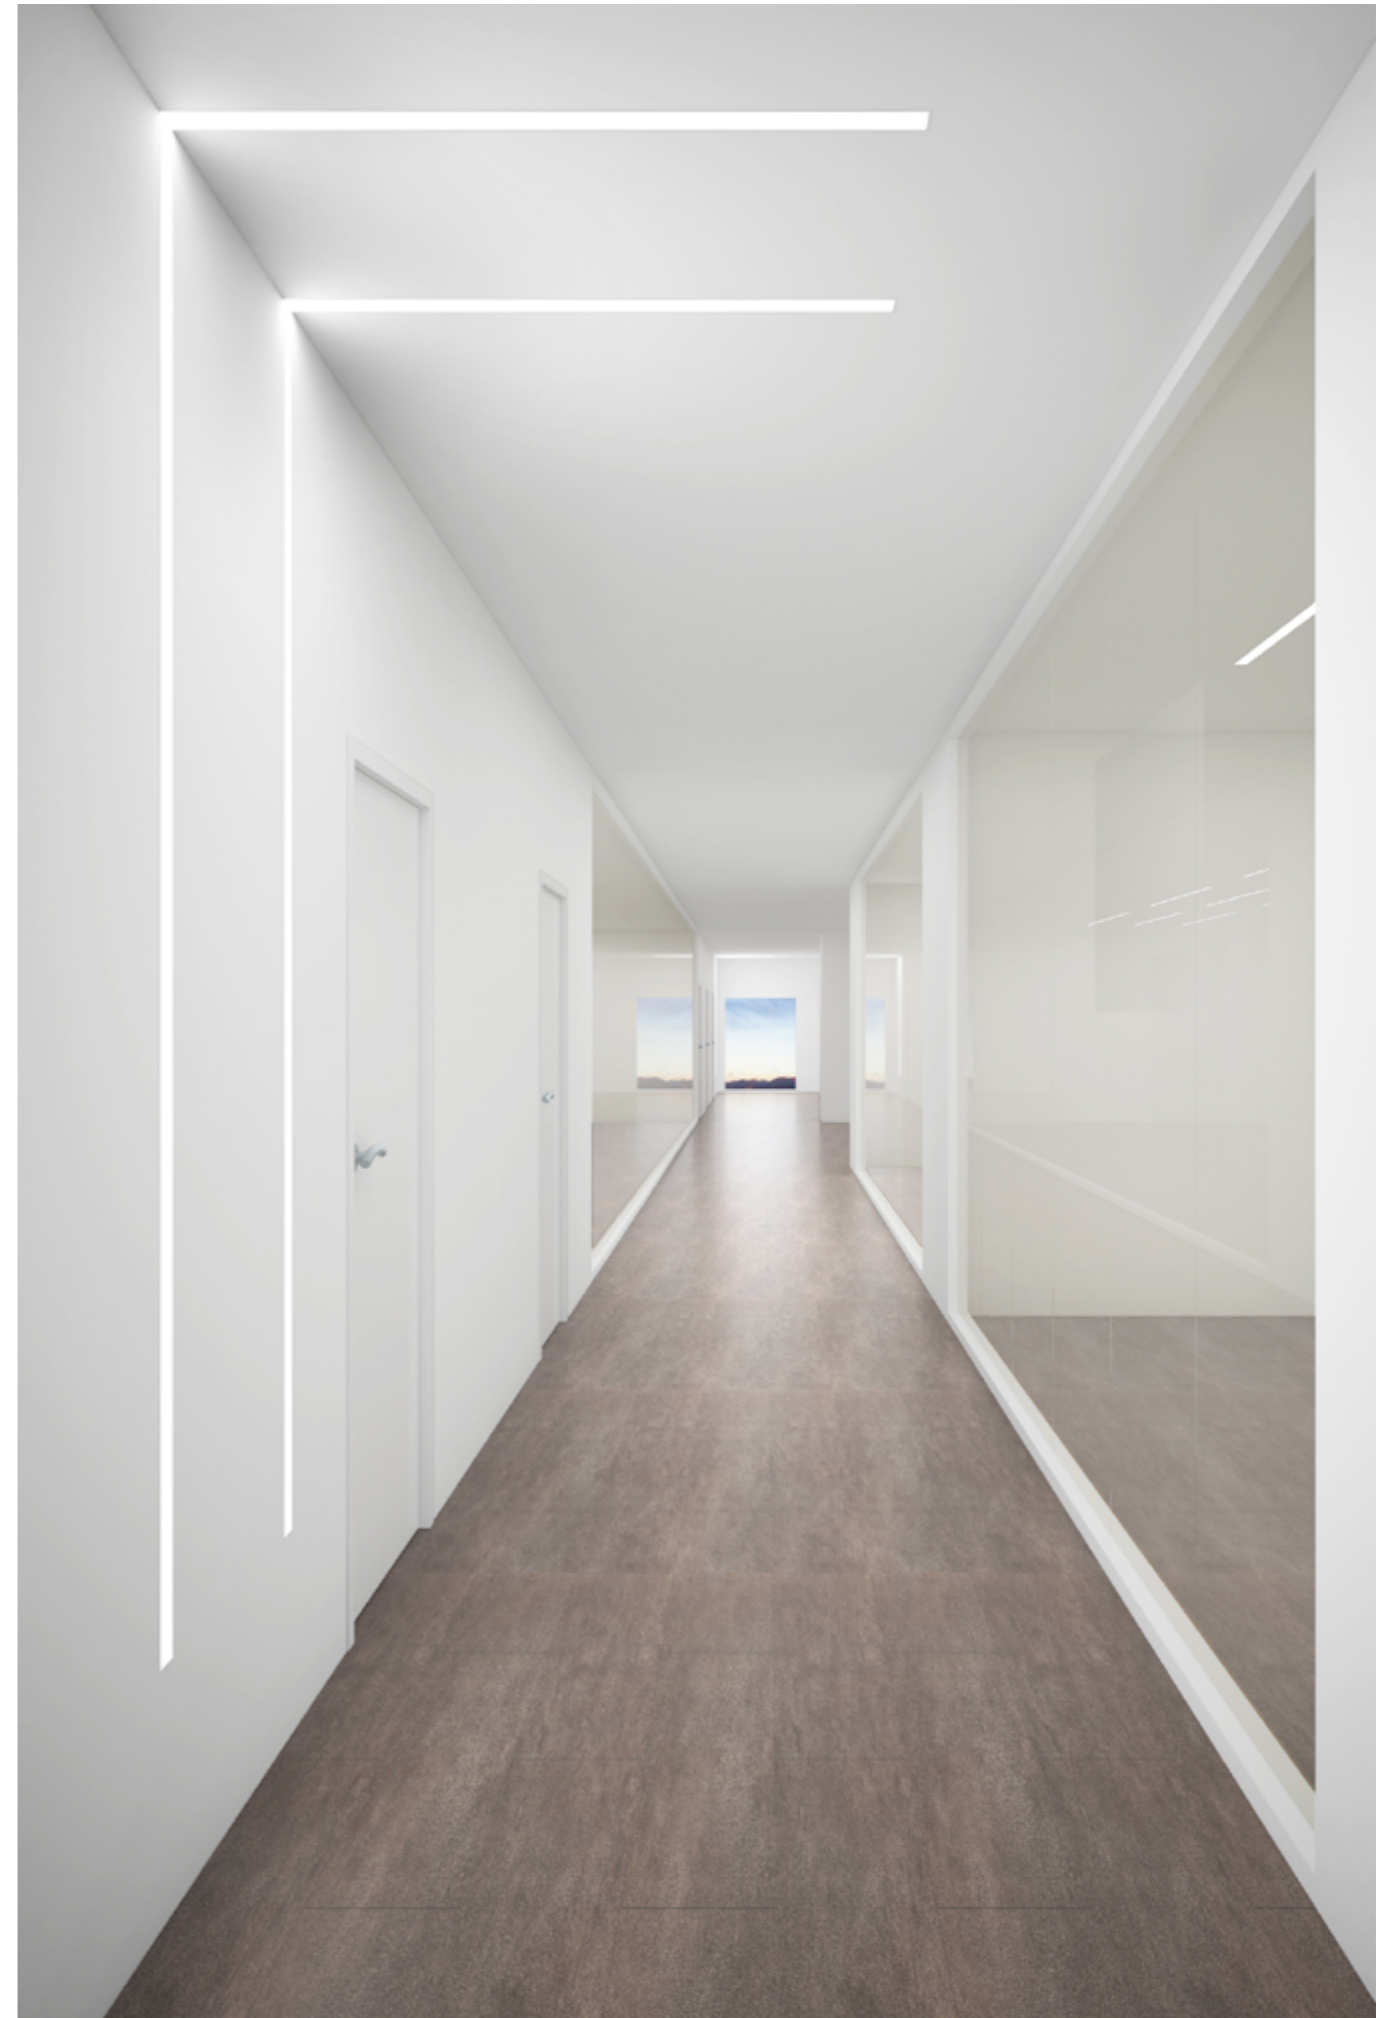


LDR 553

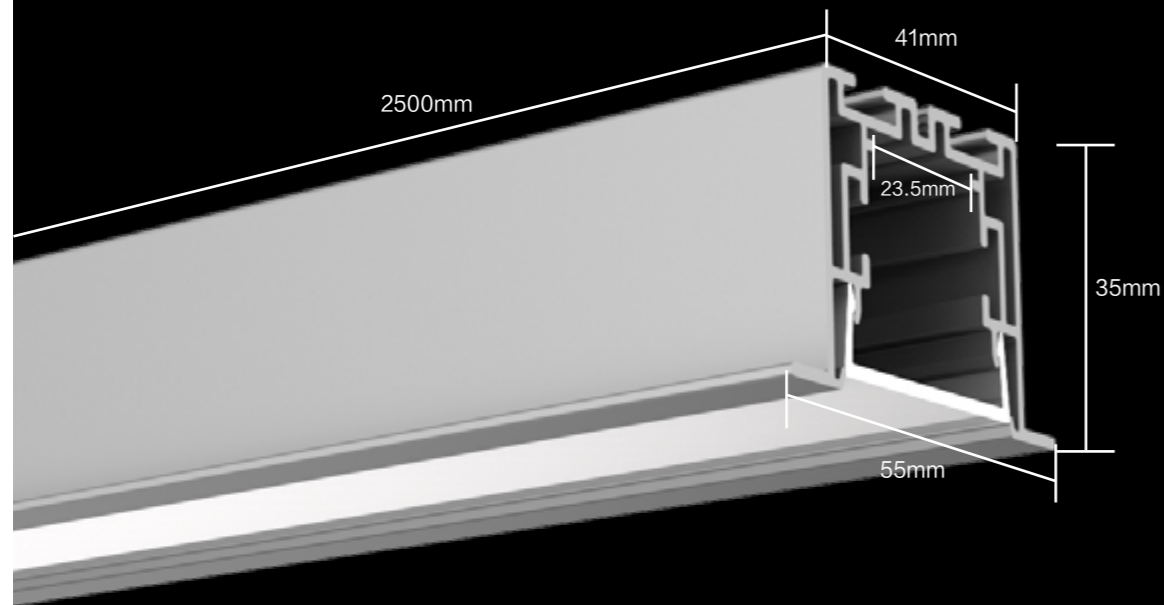

PHOTOMETRIC OF 1.2M LUMINAIRE

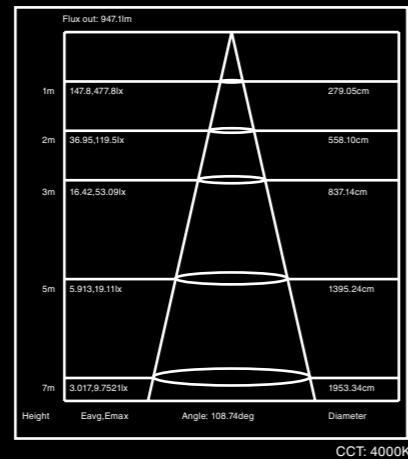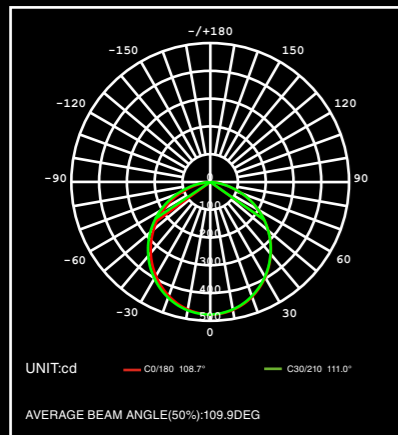

CCT: 4000K

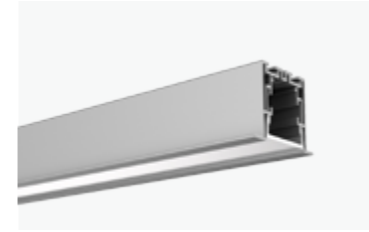

Profile	Profile
Material	Aluminium 6063
Standard coating	Silver Anodization
Optional coating	White /Black Powder Coating

Essential

End cap x2	LDR553-EC 55x35x18mm	
Diffuser x1	LDR553-CV 2500mm	
Cable clip	LDR553-BG	

Lighting Source and Power Supply *

Flexible strip	LDR828-20 2500x20x1.7mm	
Rigid modular	LDR828-23 249/299/499x23x5.6mm	
25W power supply	LDR-V24-025 330x21x20mm	

Installation Accessories *


Recessed buckle (N-shaped)	LDR553-RN 107.3x45x39.5mm	
Recessed buckle (Butterfly clips)	LDR553-RB 46x35x26mm	

Connectors *




180° extender	LDR553-180 55x10x2mm	
"L"-type light corner	LDR553-L90 107x107x35mm	
"L"-type light corner (inner)	LDR553-L90N 100x100x55mm	
"L"-type light corner (exterior)	LDR553-L90W 100x100x55mm	
"T"-type light corner	LDR553-T90 150x107x35mm	
"X"-type light corner	LDR553-X90 150x150x35mm	

* Optional parts

LDR 693

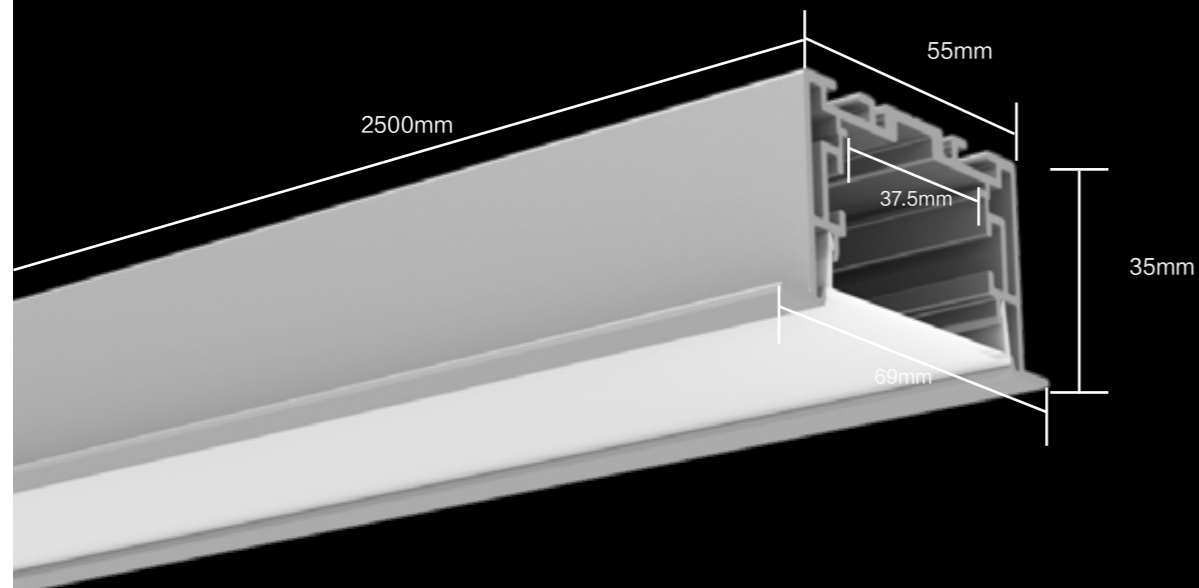

PHOTOMETRIC OF 1.2M LUMINAIRE

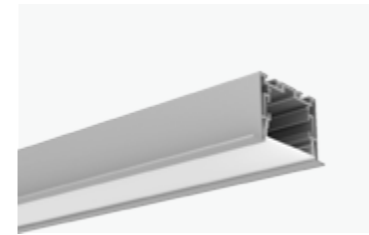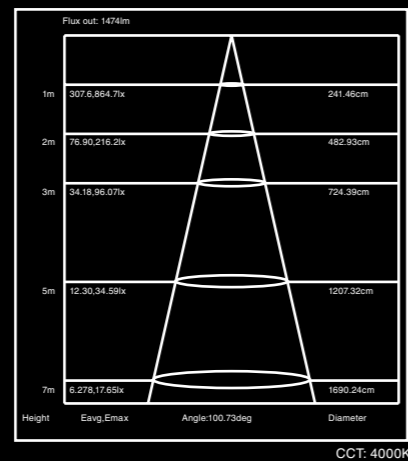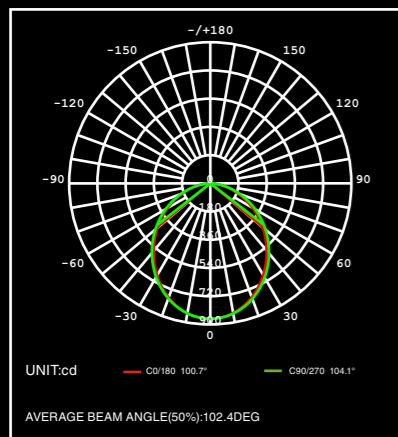

Profile	Profile
Material	Aluminium 6063
Standard coating	Silver Anodization
Optional coating	White /Black Powder Coating

Essential

End cap x2	LDR693-EC 69x35x18mm	
Diffuser x1	LDR693-CV 2500mm	
Cable clip	LDR693-BG	

Lighting Source and Power Supply *

Flexible strip	LDR828-34 2500x34x1.7mm	
Rigid modular	LDR828-36 299/499x36x5.6mm	
65W power supply	LDR-V24-065 363x34.5x22.5mm	

Installation Accessories *


Recessed buckle (N-shaped)	LDR693-RN 99.8x59x39.5mm	
Recessed buckle (Butterfly clips)	LDR693-RB 46x35x26mm	

Connectors *



180° extender	LDR693-180 55x10x2mm	
"L"-type light corner	LDR693-L90 107x107x35mm	
"L"-type light corner (inner)	LDR693-L90N 100x100x69mm	
"L"-type light corner (exterior)	LDR693-L90W 100x100x69mm	
"T"-type light corner	LDR693-T90 150x107x35mm	
"X"-type light corner	LDR693-X90 150x150x35mm	

* Optional parts

LDR943

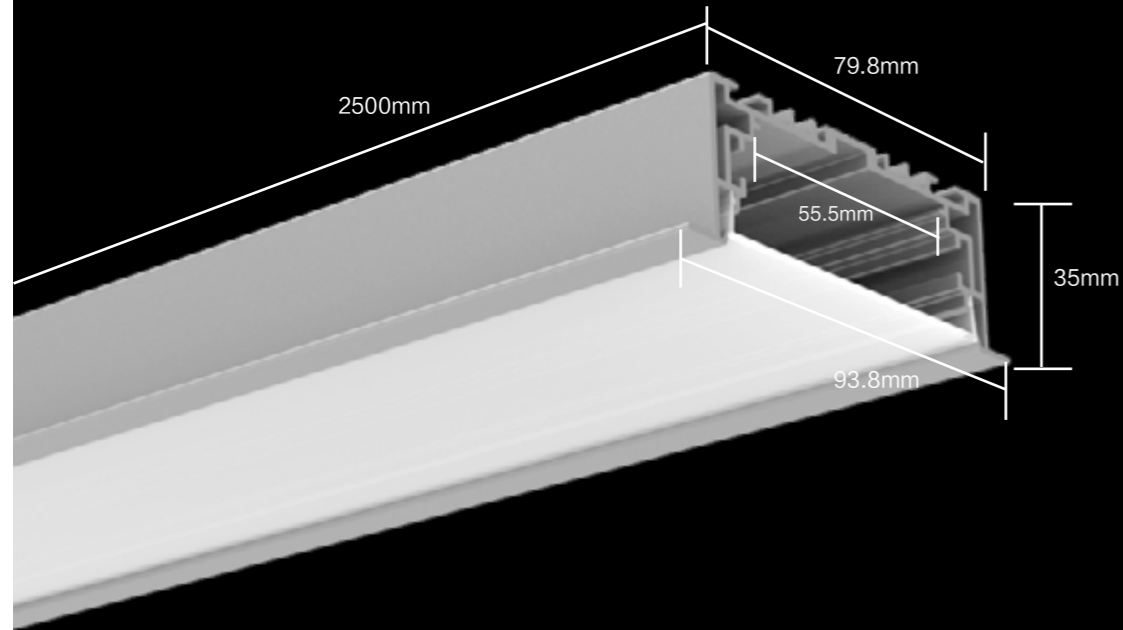

PHOTOMETRIC OF 1.2M LUMINAIRE

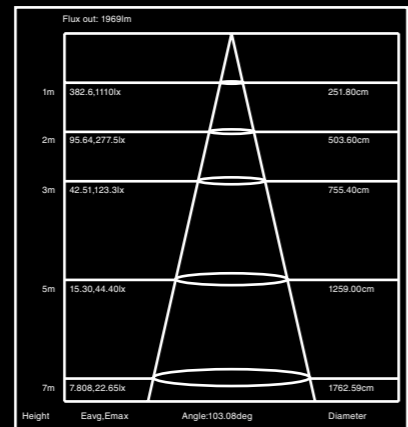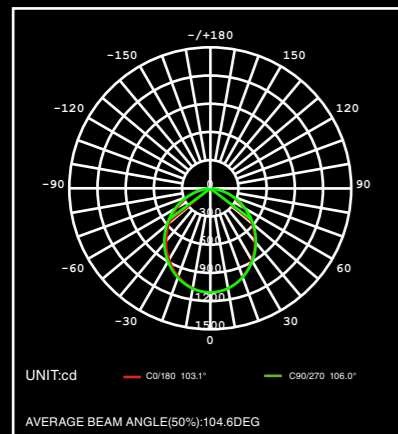

CCT: 4000K



Profile	Profile
Material	Aluminium 6063
Standard coating	Silver Anodization
Optional coating	White /Black Powder Coating

Essential

End cap x2	LDR943-EC 94x35x18mm	
Diffuser x1	LDR943-CV 2500mm	
Cable clip	LDR943-BG	

Lighting Source and Power Supply *

Flexible strip	LDR842-52 2500x52x1.7mm	
Rigid modular	LDR842-55 299/499x55x5.6mm	
100W power supply	LDR-V24-100 390x38x28.5mm	

Installation Accessories *

Recessed buckle (N-shaped)	LDR943-RN 96x84x39.5mm	
Recessed buckle (Butterfly clips)	LDR943-RB 46x35x26mm	


Connectors *

180° extender	LDR943-180 55x10x2mm	
"L"-type light corner	LDR943-L90 157x157x35mm	
"L"-type light corner (inner)	LDR943-L90N 150x150x94mm	
"L"-type light corner (exterior)	LDR943-L90W 150x150x94mm	
"T"-type light corner	LD943-T90 200x157x35mm	
"X"-type light corner	LE943-X90 200x200x35mm	

* Optional parts

LDRC SERIES


Profilo direzionale sopra - sotto
illuminazione elegante e notevole potenza
tappi di chiusura a connessione magnetica





LDRC1284



LDRC1284

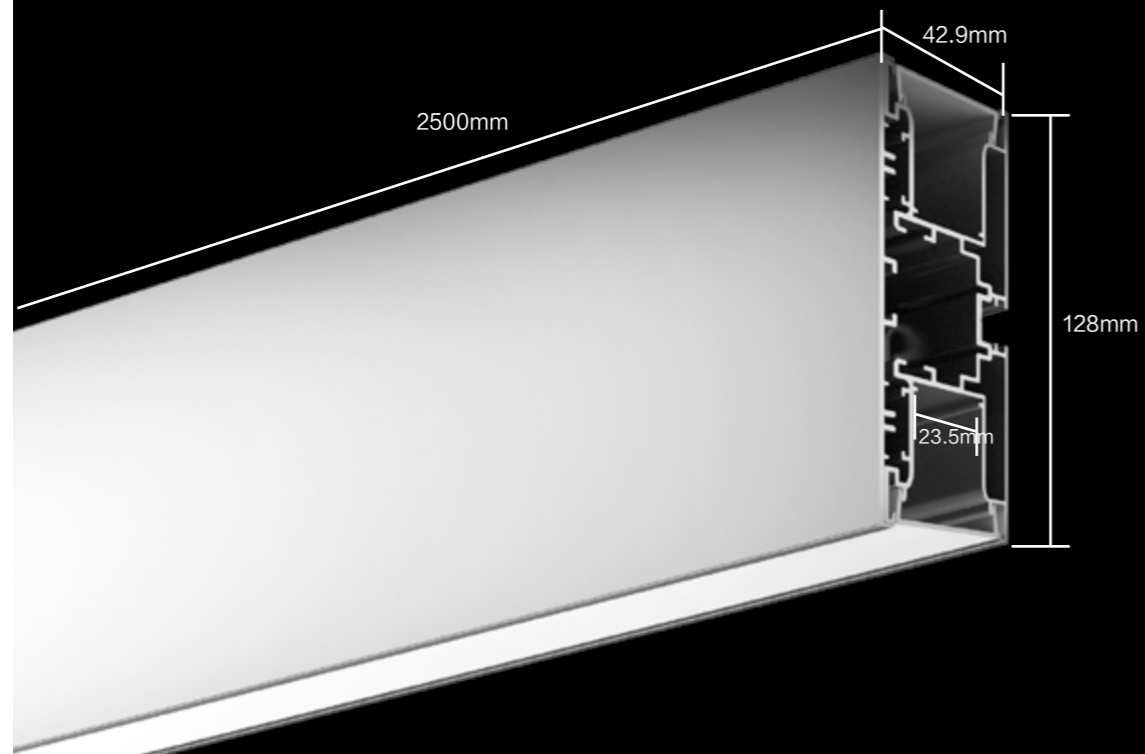

PHOTOMETRIC OF 1.2M LUMINAIRE

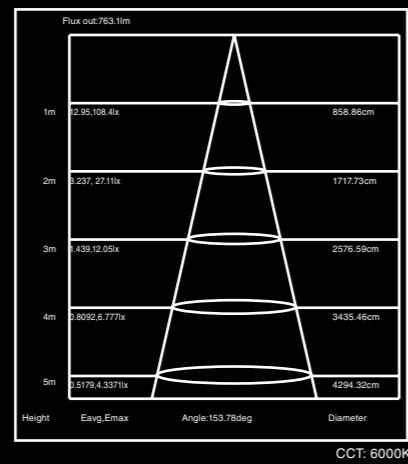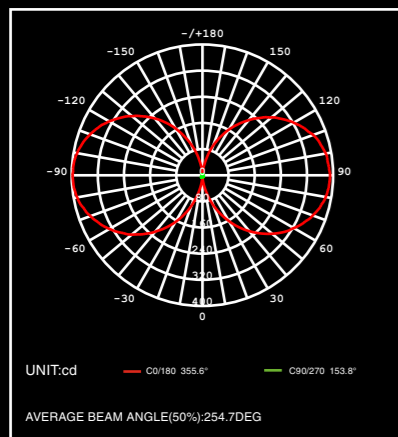

Profile	Profile
Material	Aluminium 6063
Standard coating	Silver Anodization
Optional coating	White /Black Powder Coating

Essential

End cap x2	LDRC1284-EC 128x43x11.5mm	
Diffuser x2	LDRC1284-CV 2500mm	
Screw set x3	LDRC1284-CL M3.5x40mm	
Safety line	LDRC1284-SR	
Cable clip	LDRC1284-BG	

Lighting Source and Power Supply *

Flexible strip	LDR828-20 2500x20x1.7mm	
Rigid modular	LDR828-23 249/299/499x23x5.6mm	
65W power supply	LDR-V24-065 363x34.5x22.5mm	

Connectors *

180° extender	LDR1284-180 55x10x2mm	
"L"-type light corner (inner)	LDRC1284-L90N 150x150x128mm	
"L"-type light corner (exterior)	LDRC1284-L90W 151.6x151.6x128mm	

* Optional parts

LED RICH PROJECT
the light of your planet

www.ledrichproject.it